

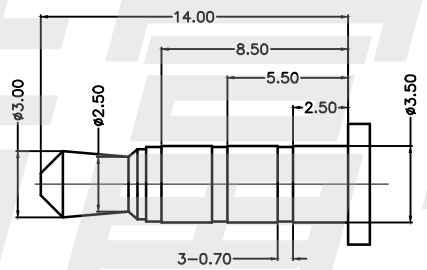
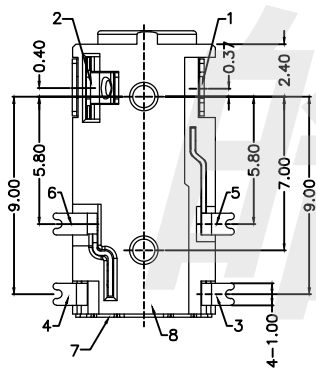



- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
 - CURRENT RATING: 12V&1A MAX.
 - CONTACT RESISTANCE: 50mOHMS MAX.
 - DIELECTRIC VOLTAGE WITHSTAND :500V AC FOR ONE MINUTE
 - INSULATION RESISTANCE:100MOHMS MIN. MEASURED BY 500V DC
 - MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE:3~30N
 - WITHDRAWAL FORCE:3~30N
 - LIFE TEST:5000 CYCLES
 - ENVIRONMENTAL:
 - OPERATING TEMPERATURE:-40°C~85°C
 - SALT SPRAY:24H AT 35°C WITH 5%-SALT-SOLUTION CONCENTRATION.
 - PACKAGE: TAPE&REEL



(ø3.50mm 4 POLE PLUG DETAIL DRAWING)

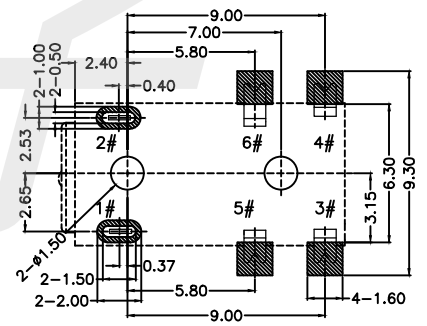

Recommended PCB Layout(TOP VIEW)
(Tolerance:±0.05)



3D VIEW

⑧	HOUSING	1	PPA; COLOR BLACK		
⑦	COVER	1	SUS304; CLEANING		
⑥	CONTACT 6#	1	C5210; NICKEL UNDER PLATING OVERALL,GOLD PLATING ON OVERALL;		
⑤	CONTACT 5#	1	C5210; NICKEL UNDER PLATING OVERALL,GOLD PLATING ON OVERALL;		
④	CONTACT 4#	1	C5210; NICKEL UNDER PLATING OVERALL,GOLD PLATING ON OVERALL;		
③	CONTACT 3#	1	C5210; NICKEL UNDER PLATING OVERALL,GOLD PLATING ON OVERALL;		
②	CONTACT 2#	1	C5210; NICKEL UNDER PLATING OVERALL,GOLD PLATING ON OVERALL;		
①	CONTACT 1#	1	C5210; NICKEL UNDER PLATING OVERALL,GOLD PLATING ON OVERALL;		
4	ITEM	PART NAME	Q'TY	MATERIAL	REMARK

HAOFU ELECTRONCS TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		PHONE JACK		DRAWING		Y,C,ZHANG		DWG.No.		SBICL	
PART NO.		PJ-3136M-D		CHECK		G.C.Chen		REV.		A1	
UNIT : mm	TOLERANCE OTHERWISE	UP TO 5	±0.2	ANGLE	APPROVAL	DATE					
		ABOVE 5~30	±0.3								
		ABOVE 30	±0.5	0°±3'	SCALE	2:1		PAGE		1 OF 1	
		ANGLE	±3'								