

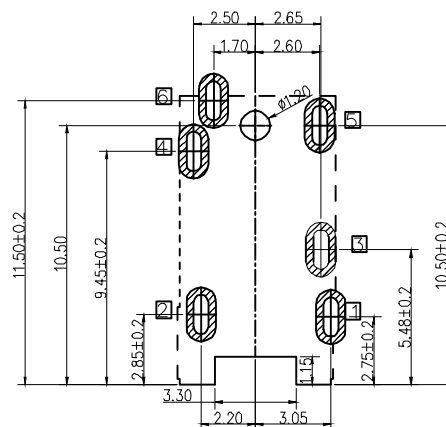

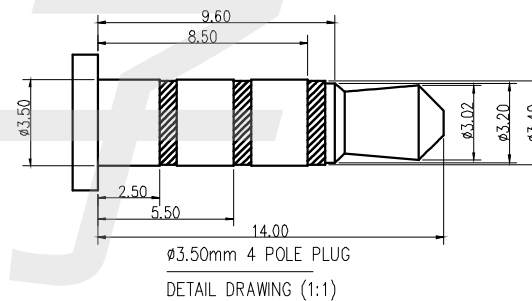



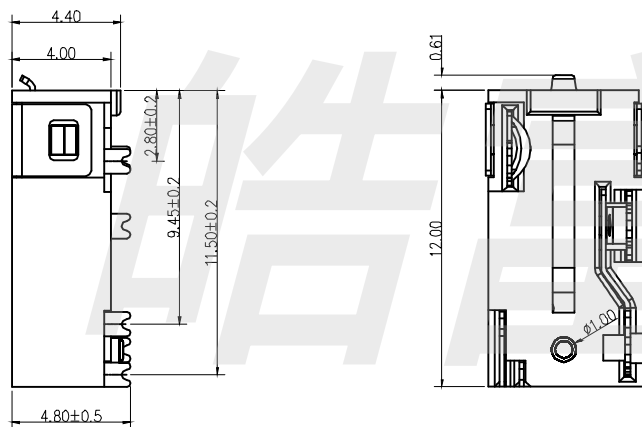


OMMENDED PCB LAYOUT(TOP CIEW)
(GENERAL TOLERANCE ± 0.05)

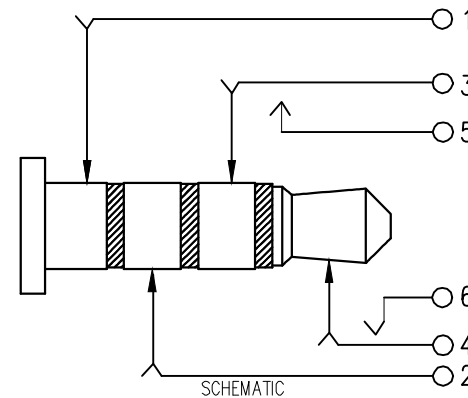

$\phi 3.50\text{mm}$ 4 POLE PLUG
DETAIL DRAWING (1:1)

7	HOUSING	GRIVORY HT	BLCK	
6	TERMNAL 6	COPPER ALLOY	—	AU PLATED
5	TERMNAL 5	COPPER ALLOY	—	AU PLATED
4	TERMNAL 4	COPPER ALLOY	—	AU PLATED
3	TERMNAL 3	COPPER ALLOY	—	AU PLATED
2	TERMNAL 2	COPPER ALLOY	—	AU PLATED
1	TERMNAL 1	COPPER ALLOY	—	AU PLATED
NO.	DESCRIPTION	MAT,L	COLOR	REMARK

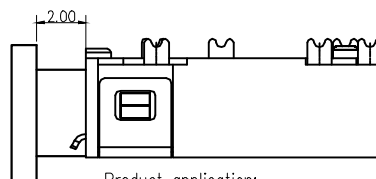

Product application:
The spring working position when Plug-In

NOTES:

1. CONTACT CURRENT RATING: 0.5A.
2. CONTACT RESISTANCE: 30 mΩ MAX.;
3. INSULATION RESISTANCE: 100Ω MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 20N (2.00Kgf) MAX.;
7. CONNECTOR UNMATING FORCES: 2.94N(0.30Kgf) MIN.;

HAOFU ELECTRONCS TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		CONNECTOR			DRAWING	Y,C,ZHANG	DWG.No.	SBICL
PART NO.		PJ-3973-WH			CHECK	G.C.Chen	REV.	A1
	UNIT :	TOLERANCE OTHERWISE	UP TO 5	±0.2	ANGLE	APPROVAL	DATE	
	mm		ABOVE 5 ~30	±0.3		SCALE	2:1	
			ABOVE 30	±0.5	0°±3°			1 OF 1
			ANGLE	±3°				