


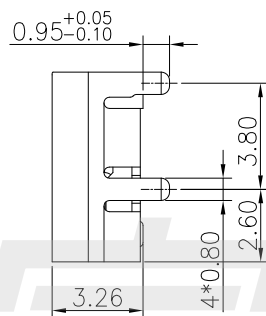




剖面图 A-A

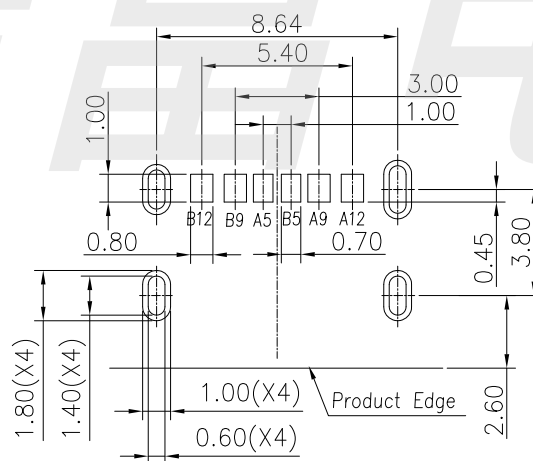

A5	CC1	B5	CC2
A9	VBUS	B9	VBUS
A12	GND	B12	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME



RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

特性注解:

1.电气特性:

额定电流: 5 A 最大

电源PIN及接地PIN1.25 A 每PIN

其它 PIN 0.25 A

工作电压: 20V Max.

介质承受电压: AC 100V /1分钟

绝缘阻抗: 100 MΩ 最小.

接触阻抗: 40 mΩ 最大.

2.环境:

工作温度: -40°C~+85°C.

3.机械特性:

插入力: 5~20Nf.

拔出力: 6~20Nf.

耐久寿命: 3000 Cycles.

4.盐雾: 24H

HAOFU ELECTRONICS TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		CONNECTOR				DRAWING	Y,C,ZHANG	DWG.No.	SBICL
PART NO.		USB TYPE C 6Pin 母头成品 普通款				CHECK	G.C.Chen	REV.	A1
	UNIT :	TOLERANCE OTHERWISE	UP TO 5	±0.2	APPROVAL		DATE		
	mm		ABOVE 5 ~30	±0.3					
			ABOVE 30	±0.5					
			ANGLE	±3°					
				0°±3°	SCALE	2:1	PAGE	1 OF 1	