
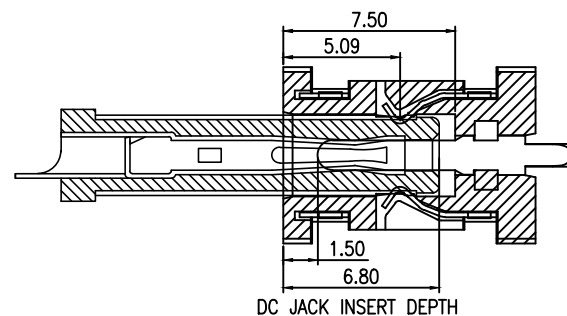
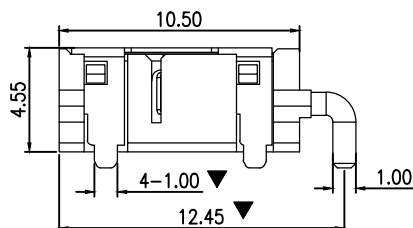


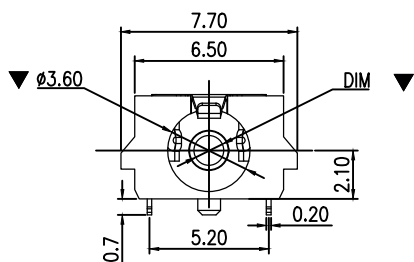

料号说明:

序号	产品料号	DIM
1	DC-184-08	0.80
2	DC-184-13	1.30
3	DC-184-15	1.50

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:


- 1-1. RATING: 24V 3A
- 1-2. CONTACT RESISTANCE: 30mΩ MAX.(INITIAL)
- 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
- 1-4. INSULATION RESISTANCE: 100M MIN. MEASURED BY 500V DC

2. MECHANICAL CHARACTERISTICS:

- 2-1. INSERTION FORCE : 0.3~3.0 KGF
- 2-2. WITHDRAWAL FORCE : 0.3~3.0 KGF


3. LIFE TEST: 5,000 CYCLES MIN.

4. FOR REFLOW SOLDERING LEAD-FREE PROCESS.

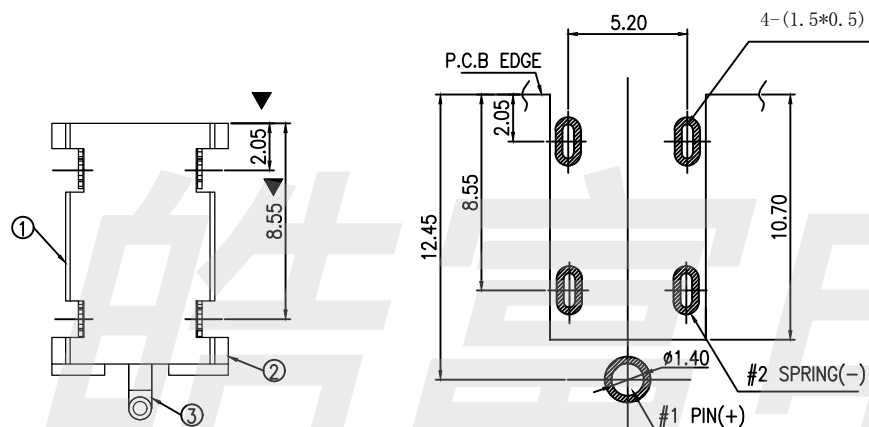RECOMMENDED PCB LAYOUT
TOP VIEW (TOLERANCE:±0.05)

—○— #1 PIN(+)
—~— #2 TIP SPRING(-)

ELECTRICAL CIRCUIT

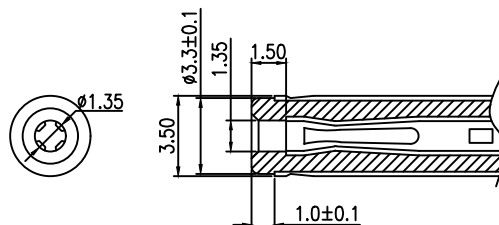

MATE PLUG

3	SHELL	1	PHORPHOS BRONZE; THE BOTTOM OF THE NICKEL(40u"MIN.); THE WHOLE GOLD FLASH PLATING	
2	CONCTOR PIN	1	BRASS; THE BOTTOM OF THE NICKEL(40u"MIN.); THE WHOLE GOLD FLASH PLATING.	
1	HOUSING	1	PA9T COLOR BLACK	
ITEM	NAME	Q'TY	DESCRIPTION	NOTE

HAOFU ELECTRONCS TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		DC POWER JACK			DRAWING	Y,C,ZHANG	DWG.No.	SBICL
PART NO.		DC-184-XX			CHECK	G.C.Chen	REV.	A1
	UNIT :	TOLERANCE	UP TO 5	±0.2	ANGLE	APPROVAL	DATE	
	mm	OTHERWISE	ABOVE 5 ~30	±0.3		SCALE	2:1	PAGE
				ABOVE 30	±0.5	0°±3°		
			ANGLE	±3°				