


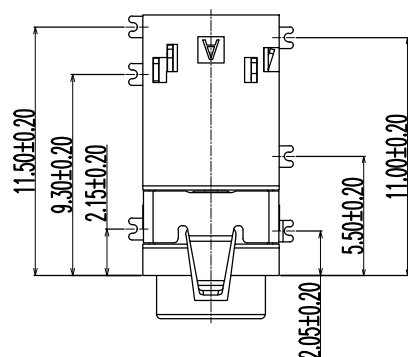





1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 50 mΩ MAX.;
3. INSULATION RESISTANCE: 1000Ω MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 30N MAX.;
7. CONNECTOR UNMATING FORCES: 3N MIN.;

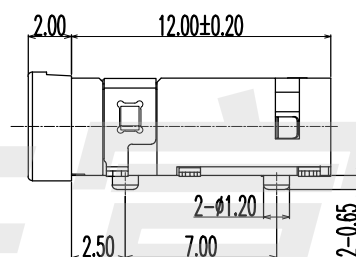


3D VIEW

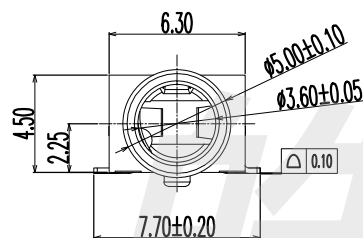

MYLAR 6.00X3.80X0.06



SCHEMATIC

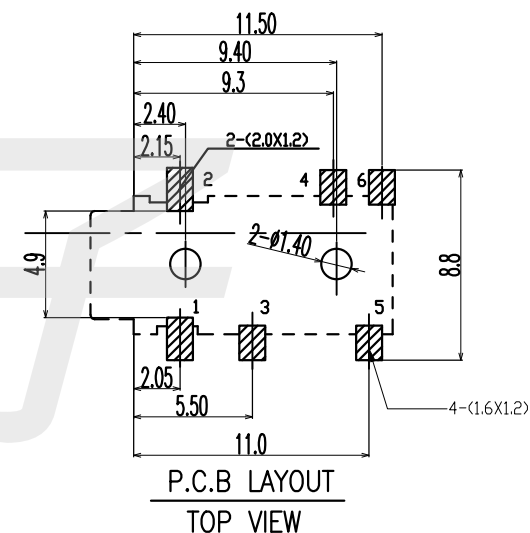P.C.B LAYOUT
TOP VIEW

7	TERMINAL 6#	1	
6	TERMINAL 5#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL; GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA
5	TERMINAL 4#	1	
4	TERMINAL 3#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL; GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA
3	TERMINAL 2#	1	
2	TERMINAL 1#	1	PHOSPHOR BRONZE; THE BOTTOM OF THE NICKEL; THE WHOLE GOLD PLATING.
1	HOUSING	1	PPA COLOR BLACK
ITEM	NAME	Q'TY	DESCRIPTION
			NOTE

HAOFU ELECTRONICS TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME

PHONE JACK

DRAWING

Y,C,ZHANG

DWG.No.

SBICL

PART NO.

PJ-316A-ER

CHECK

G.C.Chen

REV.

A1

UNIT :
mmTOLERANCE
OTHERWISEUP TO 5
ABOVE 5 ~30
ABOVE 30
ANGLE±0.2
±0.3
±0.5
±3°ANGLE
0°±3°APPROVAL
SCALE

2:1

DATE
PAGE

1 OF 1