


额定电负荷 DC 30V\1A
 接触电阻 $\leq 0.03 \Omega$
 绝缘电阻 $\geq 100M \Omega$
 耐 压 AC500V (50Hz) min
 插 拔 力 5-25N
 耐 温 $-20 \sim 70^{\circ}C$
 使用寿命 ≥ 5000 次

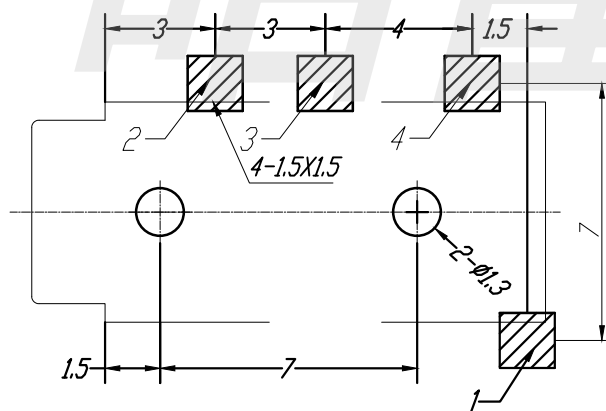

5	EJ-3534-05	基 座	1	LCP		
4	EJ-3534-04	4号插片	1	Qsn6.5-0.1	0.2	Ag
3	EJ-3534-03	3号插片	1	Qsn6.5-0.1	0.2	
2	EJ-3534-02	2号插片	1	Qsn6.5-0.1	0.2	
1	EJ-3534-01	1号插片	1	Qsn6.5-0.1	0.2	
序号	产品编号	产品名称	数量	材 料	规 格	电 镀

HAOFU ELECTRONICS TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		PHONE JACK		DRAWING	Y,C,ZHANG	DWG.No.	SBICL
PART NO.		PJ-320DS		CHECK	G.C.Chen	REV.	A1
UNIT :	mm	TOLERANCE	UP TO 5	APPROVAL	SCALE	DATE	
		OTHERWISE	ABOVE 5~30			ANGLE	PAGE
			± 0.2		2:1		1 OF 1
			± 0.3				
			± 0.5				
			ANGLE				
			$0^{\circ} \pm 3^{\circ}$				