

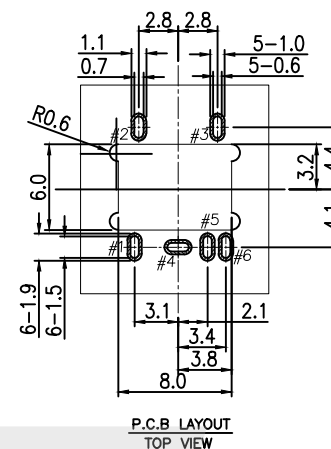
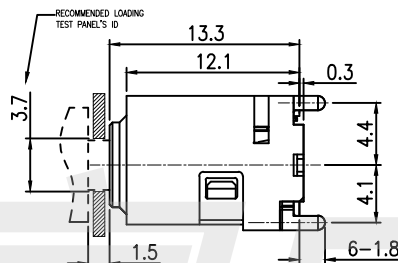






RoHS
Compliant

SYMBOL	REVISION	APPROVAL	DATE

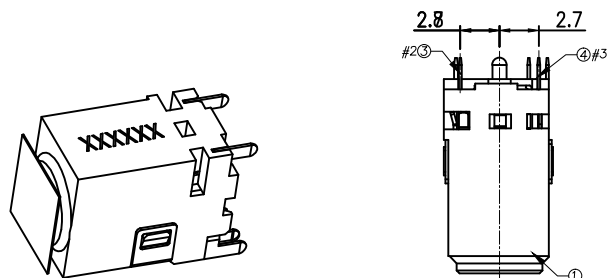

NOTES:

1. MATERIAL: SEE "TABLE 1";
2. FINISH: SEE "TABLE 1";
3. ELECTRICAL:
 - 3.1. VOLTAGE RATING: 12 VAC RMS;
 - 3.2. CURRENT RATING: 1 AMP;
 - 3.3. CONTACT RESISTANCE: 50mΩ Max.(Initial), 100mΩ Max.(After Life test);
 - 3.4. INSULATION RESISTANCE: 100 MΩ Min., 500VDC.(Initial), 50 MΩ Min., 500VDC.(After Humidity test);
 - 3.5. WITHSTAND VOLTAGE: 500 VAC RMS 50(60)Hz, 1 minute;
4. INITIAL:
 - 4.1. INSERTION FORCE: 0.5~3.0Kgf;
 - 4.2. WITHDRAWAL FORCE: 0.5~3.0Kgf;
5. OPERATING LIFE: 5000 CYCLES MIN.;

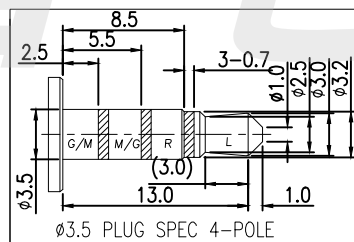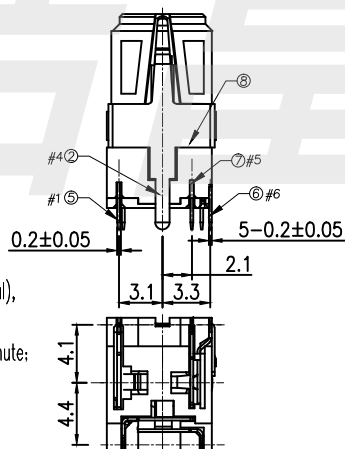

9	MYLAR	POLYIMIDE FILM	1	BLACK
8	SEPARATOR	PPA	1	BLACK
7	TRANSFER TERMINAL	C5210	1	Au PLATED
6	MAKE TERMINAL	C5210	1	Au PLATED
5	TIP-SPRING	SUS301	1	Au PLATED
4	RING B	C5210	1	Au PLATED
3	RING A	C5210	1	Au PLATED
2	EARTH-SPRING	C5210	1	Au PLATED
1	BODY	PPA	1	BLACK
NO.	PARTS	MATERIAL	QTY.	FINISHING

HAOFU ELECTRONCS TECHNOLOGY CO., LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	PHONE JACK(STEREO)	DRAWING	G.C.Chen	DWG.No.	
PART NO.	PJ-605T1	CHECK	G.C.Chen	REV.	A
UNIT :	UP TO 5 ABOVE 5 ~30 ABOVE 30 ANGLE	APPROVAL		DATE	
mm	TOLERANCE OTHERWISE	SCALE	3:1	PAGE	1 OF 1