
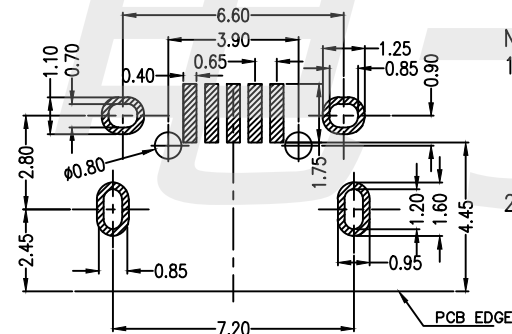
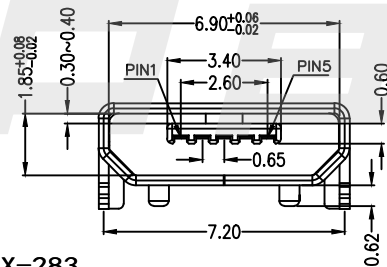



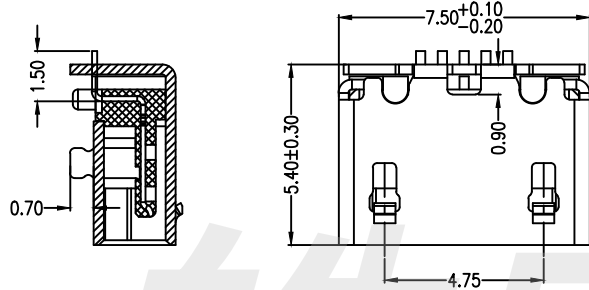


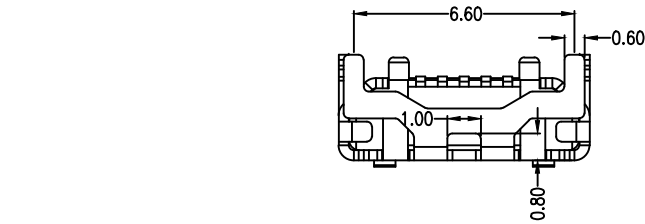

PCB 图仅做参考

RECOMMEND PCB LAYOUT

Note:

1.Material:

- 1.1 Housing: LCP High temperature thermoplastic with g.f,UL94v-0
- 1.2 Contact: copper alloy,t=0.15mm
- 1.3 Shell: SUS304,t=0.30mm

2.Specification:

- 2.1 Current rating:1,5PIN 1.8A Max/2,3,4PIN 1A Max.
- 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 100 MΩ Min.
- 2.5 Total mating force: 3.57 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min.
- 2.7 Temperature range: -30°C~80°C

A 01 S B X X X X XX-283
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪外壳材质
7:SUS304R-1/2H外壳电镀
1:N50u''
2:雾T50u''
3:N+Au1u'' (脚)
4:Au1u''端子电镀
01:Au1u'';02:Au1.5u'';03:Au3u''
05:Au5u'';10:Au10u'';15:Au15u'';30:Au30u''主体颜色 B:黑色
主体材质 1:LCP
端子材质 4:05191R-EH

HAOFU ELECTRONCS TECHNOLOGY CO., LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME

CONNECTOR

DRAWING

Y,C,ZHANG

DWG.No.

SBICL

PART NO.

MICRO USB 5S B TYPE牛角型全插6.60有柱加长0.75无无位

CHECK

G.C.Chen

REV.

A1

UNIT :
mmTOLERANCE
OTHERWISEUP TO 5
ABOVE 5~30
ABOVE 30
ANGLE±0.2
±0.3
±0.5
±3°

ANGLE

0°±3°

APPROVAL

SCALE

2:1

DATE

PAGE

1 OF 1