


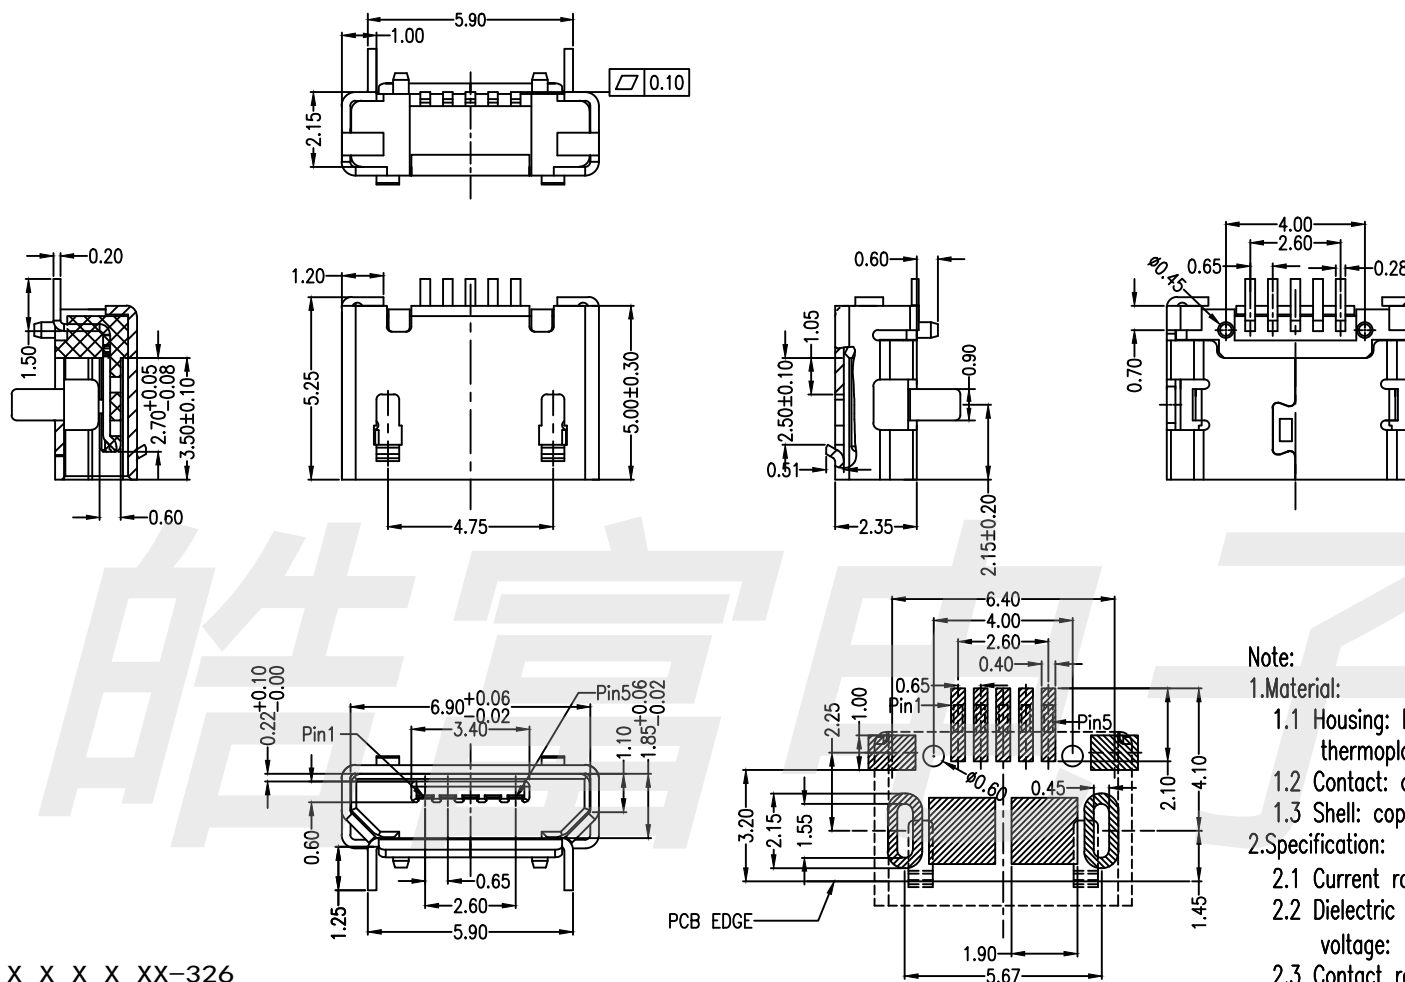

Note:

1.Material:

- 1.1 Housing: High temperature thermoplastic with g.f,UL94v-0
- 1.2 Contact: copper alloy,t=0.20mm
- 1.3 Shell: copper alloy,t=0.25mm

2.Specification:

- 2.1 Current rating:1,5PIN 1.8A Max/2,3,4PIN 1A Max.
- 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 100 MΩ Min.
- 2.5 Total mating force: 3.57 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min.
- 2.7 Temperature range: -30°C~80°C

A 01 S B X X X X X XX-326

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪

外壳材质
1: C2680R-H

外壳电镀

- 1: NS0u''
- 2: 雾T50u''
- 3: N+Au1u'' (脚)
- 4: Au1u''

端子电镀 01: Au1u''; 02: Au1.5u''; 03: Au3u''

05: Au5u''; 10: Au10u''; 15: Au15u''; 30: Au30u''

主体颜色 B: 黑色

主体材质 1: LCP

端子材质 4: C5191R-EH

RECOMMENDED PCB LAYOUT

PCB图仅供参考

HAOFU ELECTRONICS TECHNOLOGY CO., LTD

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME

CONNECTOR

DRAWING

Y,C,ZHANG

DWG.No.

SBICL

PART NO.

Micro usb 5s B Type 有焊脚插板5.9有柱无焊位加长0.75脚长1.25

CHECK

G.C.Chen

REV.

A1



UNIT :

mm

TOLERANCE

OTHERWISE

UP TO 5

ABOVE 5~30

ABOVE 30

ANGLE

±0.2

±0.3

±0.5

±3°

ANGLE

0°±3°

APPROVAL

SCALE

2:1

DATE

PAGE

1 OF 1