

Note:

1. Material:

1.1 Housing: Hi-temp thermoplastic+g.f, UL94v-0

1.2 Contact: copper alloy, $t=0.20\text{mm}$ 1.3 Shell: copper alloy, $t=0.25\text{mm}$

2. Specification:

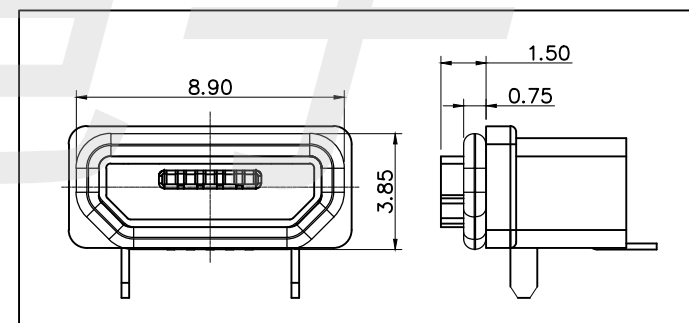
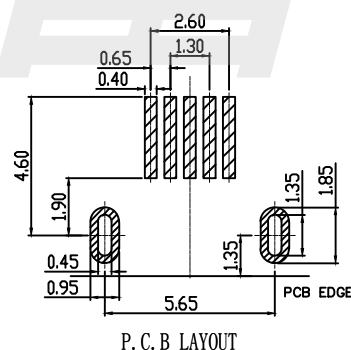
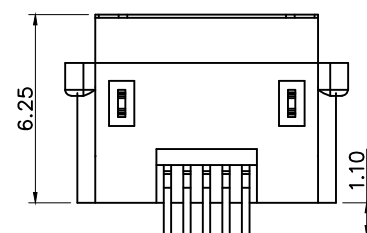
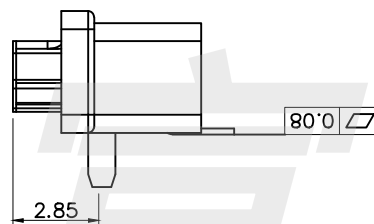


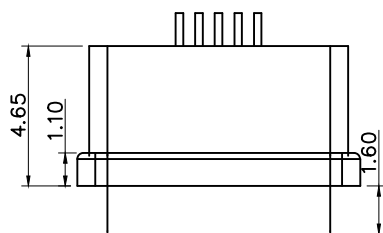
2.1 Current rating: 1A Max

2.2 withstanding voltage: 100V(AC) for 1 min.

2.3 Contact resistance: $50\text{m}\Omega$ Max.2.4 Insulation resistance: $100\text{m}\Omega$ min.

2.5 mating force: 3.57 Kgf Max.

2.6 unmating force: 1.0Kgf Initial, 0.8Kgf after tested.

2.7 Temperature range: $-30^{\circ}\text{C}\sim 80^{\circ}\text{C}$ 

③	CONTACT	5	BRASS	G/F, T=0.20
②	HOUSING	1	LCP	UL94V-0, BK
①	SHELL	1	BRASS/StainlessSteel	Ni PLATED, T=0.25
ITEM	PART NAME	Q' TY	MATETIALS	REMARK

HAOFU ELECTRONICS TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	CONNECTOR		DRAWING	Y,C,ZHANG	DWG.No.	SBICL
PART NO.	MICRO USB 5P 90° 5.65两脚防水		CHECK	G.C.Chen	REV.	A1
	UNIT : mm	TOLERANCE OTHERWISE	UP TO 5 ±0.2 ABOVE 5~30 ±0.3 ABOVE 30 ±0.5 ANGLE ±3°	ANGLE 0°±3°	APPROVAL	DATE
					SCALE	PAGE
					2:1	1 OF 1