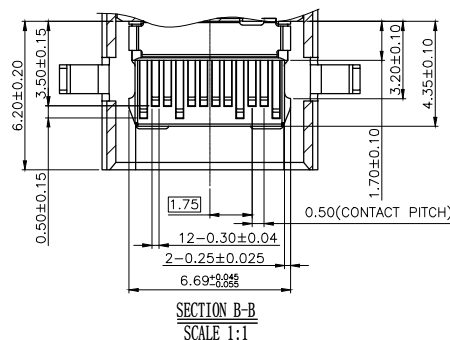



备注:

1.材质:

1.1胶芯: LCP+30%G.F UL94V-0

1.2端子: COPPER ALLOY; 镍底, 镀金Xμ"

1.3外壳: SUS304; 表面镀镍100μ"  
或亮锡100μ"

1.3护板: SUS304;

2.主要特性:

2.1额定电流: 5.0A (5A MIN FOR VBUS;  
0.25A MIN FOR OTHER.)

2.2接触阻抗: 40mΩ MAX

2.3绝缘阻抗: 100MΩ MIN 100V DC

2.4耐压测试: 100V AC

2.5沾锡性: 温度250±5℃, 时间5±0.5s

2.6整体插入力: 0.50~2.00kgf MAX  
整体拔出力: 0.80~2.00kgf MIN

2.7使用寿命: 10000次

2.8工作温度: -55℃~+85℃

产品料号:

USCX-24FX-XXMX-34

1-G.P

2-RoHS

3-REACH

4-HF/无卤

1-卷带包装  
2-PVC盒

N-可焊镍

S-雾锡

T-亮锡

A-金

K-黑色

N-本色

B-半金雾锡 1u"

D-半金雾锡 5u"

F-半金雾锡 15u"

H-半金雾锡 30u"

HAOFU ELECTRONICS TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME

CONNECTOR

DRAWING

Y,C,ZHANG

DWG.No.

SBICL

PART NO.

USB 3.1 C TYPE 沉板 DIP+SMT成品短体8.65L四脚插板

CHECK

G.C.Chen

REV.

A1



UNIT :

mm

TOLERANCE

OTHERWISE

UP TO 5

ABOVE 5~30

ABOVE 30

ANGLE

±0.2

±0.3

±0.5

±3°

ANGLE

0°±3°

APPROVAL

SCALE

2:1

DATE

PAGE

1 OF 1