


RECOMMENDED PCB LAYOUT
TOP VIEW (.XX±0.05)

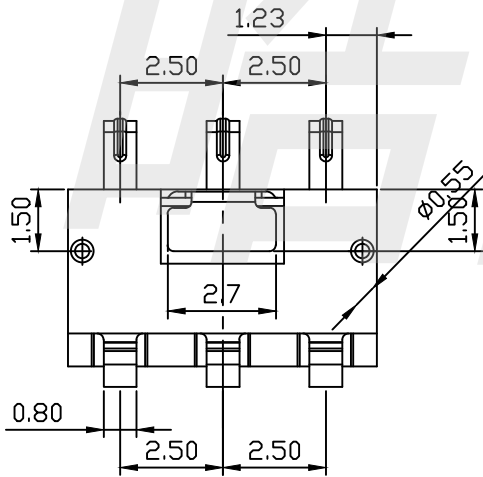

PART NO.	A	B	C
BC3P25H54	5.4	3.8	4.6
BC3P25H60	6.0	4.4	5.2
BC3P25H65	6.5	4.9	5.7
BC3P25H70	7.0	5.4	6.2
BC3P25H75	7.5	5.9	6.7
BC3P25H80	8.0	6.4	7.2

性能:

额定电流: 2.0A

额定电压: 12V

耐电压: 500V

接触电阻: 30mΩ

绝缘电阻: 500MΩ

工作温度: -40℃~+85℃

塑件(材质): LCP

接触点(材质): 磷铜, 镀金

HAOFU ELECTRONICS TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		CONNECTOR		DRAWING		Y,C,ZHANG		DWG.No.		SBICL	
PART NO.		BC3P25HXX		CHECK		G.C.Chen		REV.		A1	
UNIT :	TOLERANCE OTHERWISE	UP TO 5	±0.2	ANGLE	APPROVAL	DATE		26-09-2013			
		ABOVE 5~30	±0.3			SCALE		PAGE		1 OF 1	
mm		ABOVE 30	±0.5	0°±3'		2:1					