


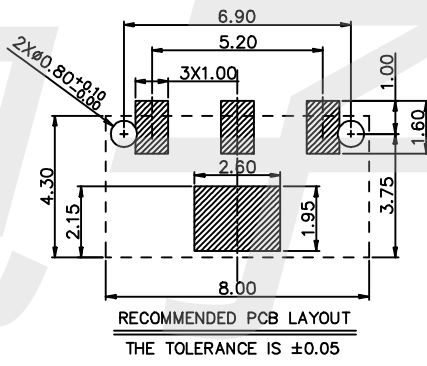
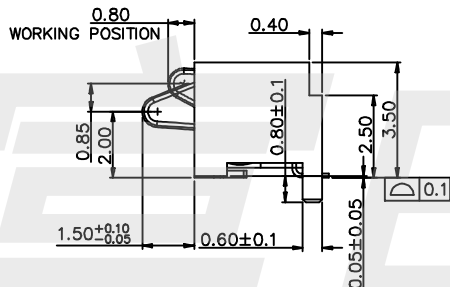


- NOTES:
- 1.ELECTRICAL PERFORMANCES:
 - 1-1. RATING CURRENT: 2A.
 - 1-2. RATING VOLTAGE: 250VAC.
 - 1-3. CONTACT RESISTANCE: 50mΩ
 - 2.MECHANICAL PERFORMANCE:
 - 2-1. DURABILITY: 5000TIMES.
 - 2-2. NORMAL FORCE AT MATING POSITION: 80g Min.
 - 2-3. OPERATION TEMPERATURE: -40°C~+85°C.



③	PAD	COPPER ALLOY	NI 50u" MIN. PLATING OVER ALL TIN 50u" MIN. PLATING OVER ALL
②	CONTACT	COPPER ALLOY	Au PLATING OVER NI 50u" MIN. AT CONTACT AREA
①	HOUSING	THERMOPLASTIC UL94V-0 COLOR: BLACK	
ITEM	DESCRIPTION	MATERIAL	FINISH

HAOFU ELECTRONICS TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		CONNECTOR		DRAWING		Y,C,ZHANG	DWG.No.	SBICL
PART NO.		BC3P26H35		CHECK		G.C.Chen	REV.	A1
UNIT :	TOLERANCE OTHERWISE	UP TO 5	±0.2	ANGLE	APPROVAL	DATE	14-03-2017	1 OF 1
		ABOVE 5~30	±0.3					
mm		ABOVE 30	±0.5	SCALE	2:1	PAGE		
		ANGLE	±3'					