


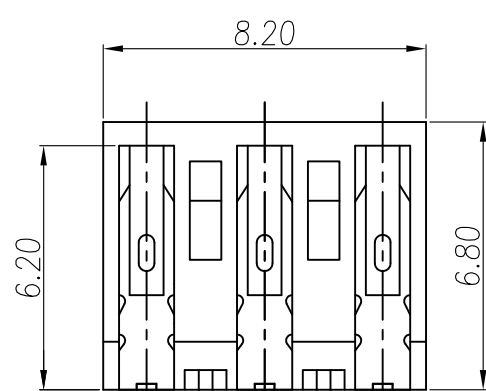


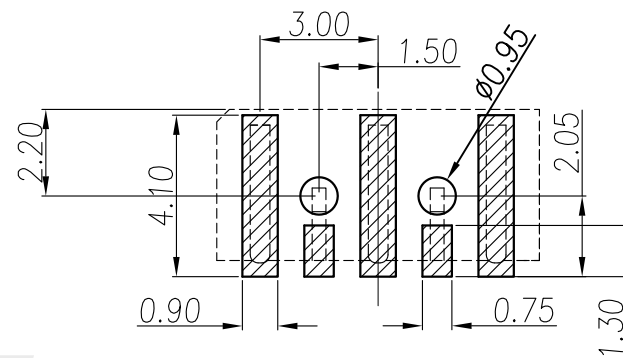

0.70MAX

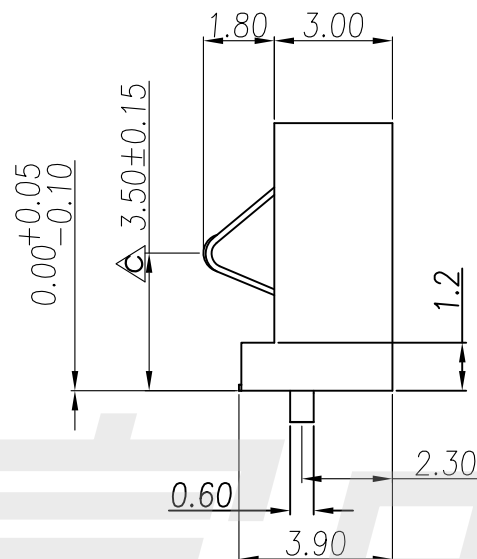

RECOMMENDED P.C.B LAYOUT



## 1. MATERIAL :

- 1-1. HOUSING : LCP UL94V-0 ; COLOR : BLACK  
1-2. CONTACT A : BERYLLIUM BRONZE  
1-3. GROUND : PHOSPHOR BRONZE

## 2. FINISH :

- 2-1. CONTACT A : 30 MICRO INCHES MIN. GOLD PLATED  
UNDER PLATE : NICKEL  
2-2. GROUND : BRIGHT TIN 60u" ~ 100u" OVER ALL

## 3. ELECTRICAL SPECIFICATION :

- 3-1. Rated current : 1.5A  
3-2. Voltage : 125V

## 4. Environmental :

- 4-1. Operation Temperature : -40℃~105℃

HAOFU ELECTRONICS TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED PLEASE DO NOT COPY.

PART NAME

CONNECTOR

DRAWING

Y,C,ZHANG

DWG.No.

SBICL

PART NO.

DC3P30H48

CHECK

G.C.Chen

REV.

A1

UNIT :  
mmTOLERANCE  
OTHERWISEUP TO 5  
ABOVE 5 ~ 30  
ABOVE 30  
ANGLE±0.2  
±0.3  
±0.5  
±3°ANGLE  
0°±3°

APPROVAL

SCALE

2:1

DATE

PAGE

05-9-2013

1 OF 1