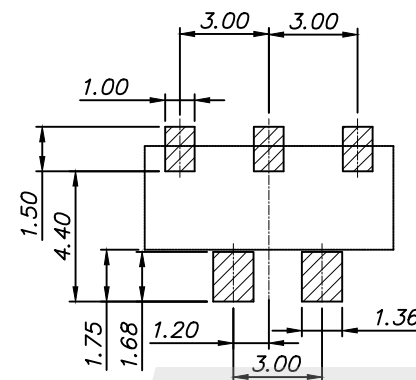

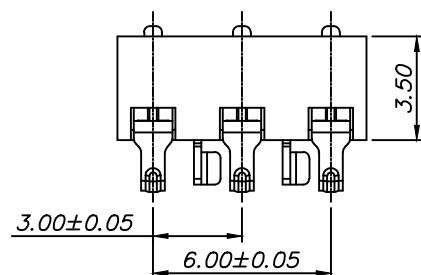
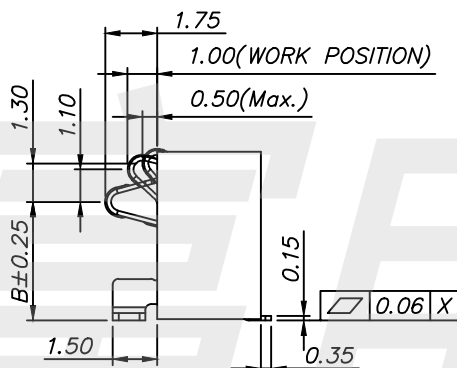
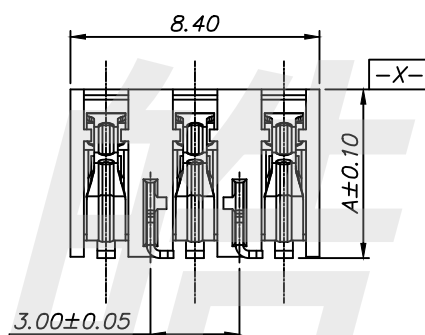


RECOMMENDED PCB LAYOUT
TOLERANCE ±0.05


NOTE:

1.MATERIAL:

- 1.1 HOUSING: HIGH TEMPERATURE THERMOPLASTIC,
UL 94V-0 COLOR: BLACK.
1.2 TERMINAL :COPPER ALLOY
1.3 STATOR: COPPER ALLOY

2.PLATING:

- 2.1 CONTACT: NI UNDERPLATING OVER ALL
GOLD FLASH ON CONTACT AREA
TIN PLATED ON SOLDER TAIL AREA
2.2 STATOR: NI UNDERPLATING OVER ALL
TIN PLATED ON STATOR



BC3P30H65	6.50	4.80
BC3P30H62	6.20	4.50
BC3P30H60	6.00	4.30
BC3P30H57	5.70	4.00
BC3P30H54	5.40	3.70
WITHOUT POST P/N	DIM A	DIM B

HAOFU ELECTRONCS TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME

CONNECTOR

DRAWING

Y,C,ZHANG

DWG.No.

SBICL

PART NO.

BC3P30HXX

CHECK

G.C.Chen

REV.

A1

UNIT :
mmTOLERANCE
OTHERWISEUP TO 5
ABOVE 5 ~30
ABOVE 30
ANGLE±0.2
±0.3
±0.5
±3°ANGLE
0°±3°

APPROVAL

SCALE

2:1

DATE

PAGE

17-06-2008

1 OF 1