

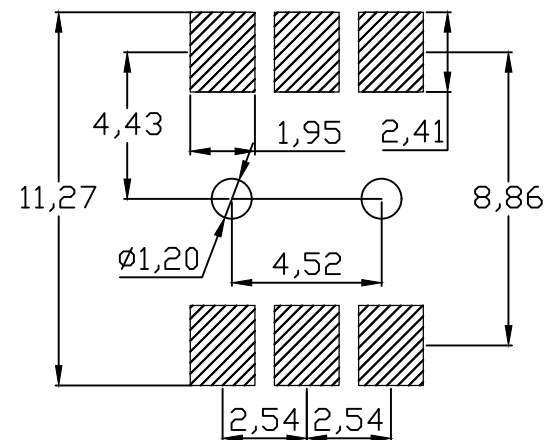
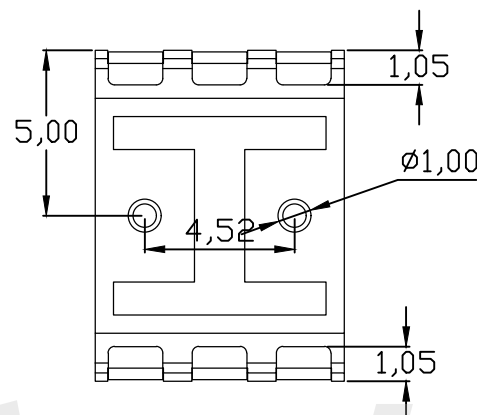
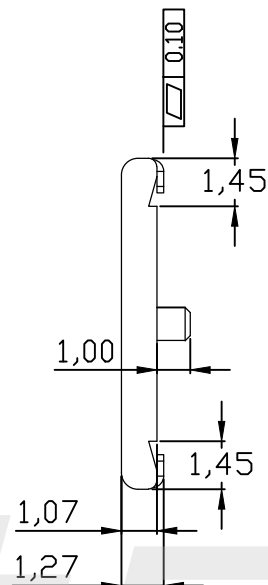
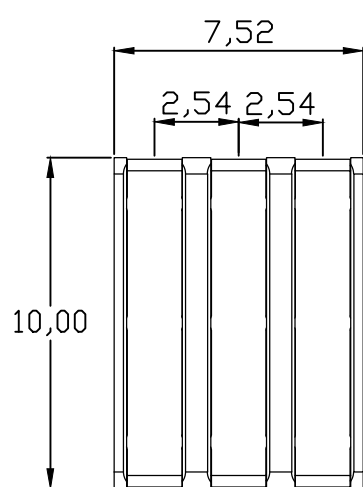


RoHS
Compliant

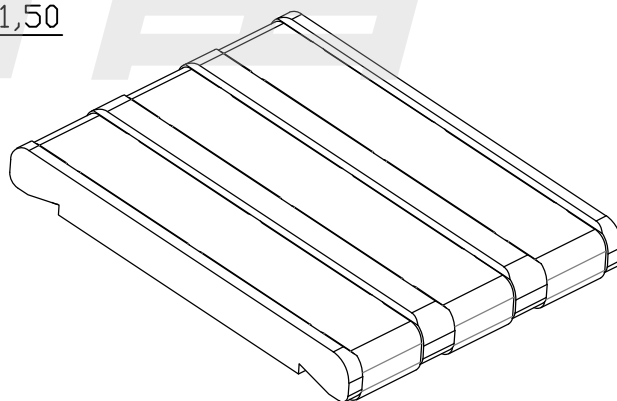

RECOMMENDED PCB LAYOUT
TOP VIEW(. XX±0.05)

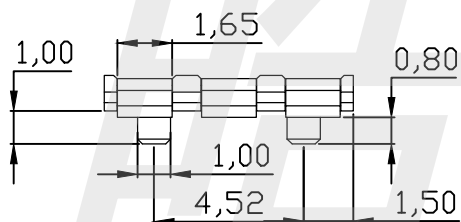

性能:

额定电流: 3.0A

额定电压: 60V

耐电压: 500V

接触电阻: 30mΩ

绝缘电阻: 500MΩ

工作温度: -55℃~+125℃

使用寿命: 10000次以上

塑件(材质): PA9T

接触点(材质): 黄铜C2680, 镀金

HAOFU ELECTRONICS TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		CONNECTOR				DRAWING	Y,C,ZHANG	DWG.No.	SBICL
PART NO.		BC3P2.54H127				CHECK	G.C.Chen	REV.	A1
	UNIT :	TOLERANCE OTHERWISE	UP TO 5	±0.2	ANGLE	APPROVAL	DATE		
	mm		ABOVE 5 ~30	±0.3		SCALE			2:1
			ABOVE 30	±0.5	0°±3°				
			ANGLE	±3°					