

性能:

额定电流: 2.0A

额定电压: 12V

耐压: 500V

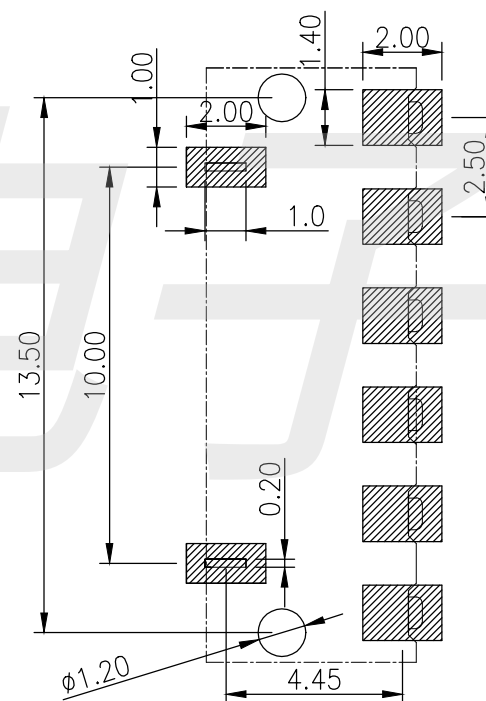
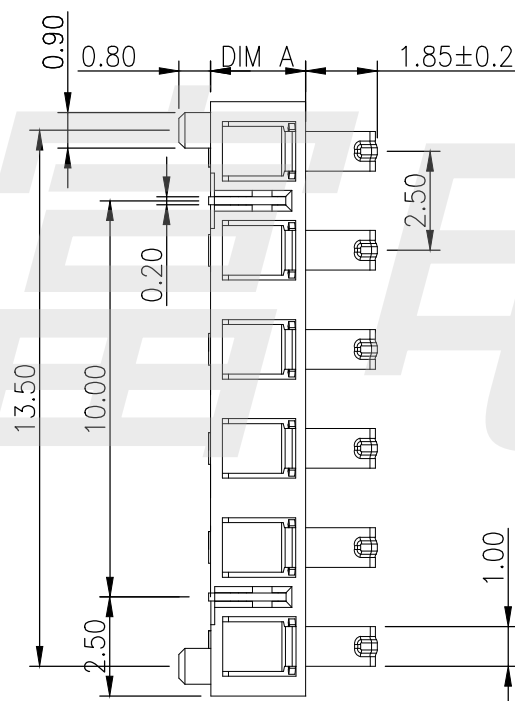
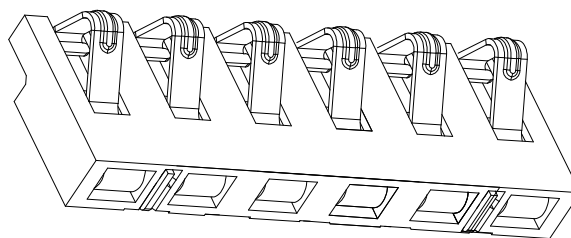
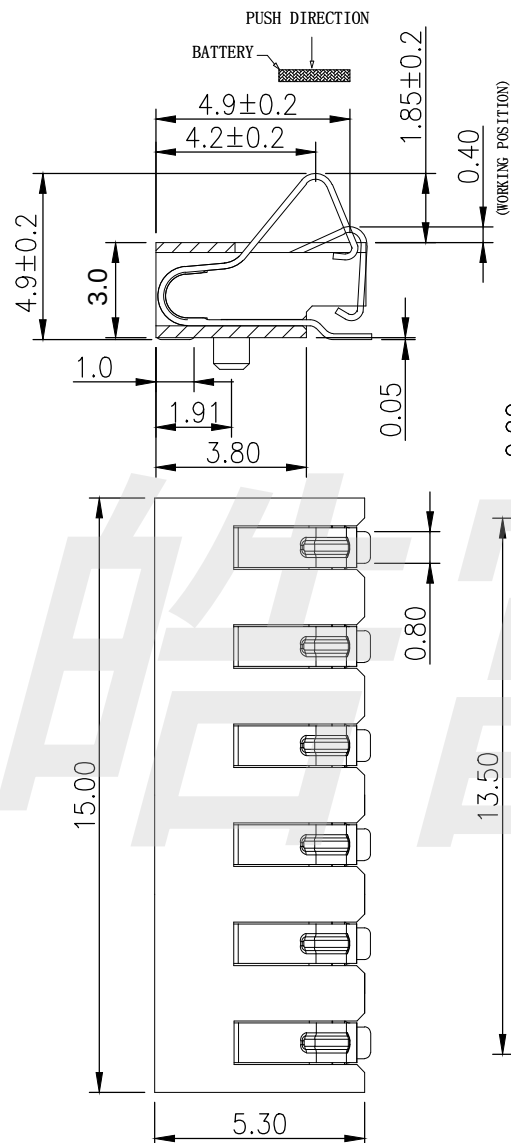
接触电阻: 30mΩ

绝缘电阻: 500MΩ

工作温度: -40℃~+85℃

塑件(材质): LCP

接触点(材质): 磷铜, 镀金

RECOMMENDED PCB LAYOUT
TOP VIEW(.XX±0.05)

HAOFU ELECTRONICS TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME

PART NO.

UNIT :
mm

CONNECTOR

BC6P25H49

TOLERANCE
OTHERWISEUP TO 5
ABOVE 5~30
ABOVE 30
ANGLE±0.2
±0.3
±0.5
±3°

DRAWING

CHECK

APPROVAL

SCALE

Y,C,ZHANG

G.C.Chen

2:1

DWG.No.

REV.

DATE

PAGE

SBICL

A1

1 OF 1