
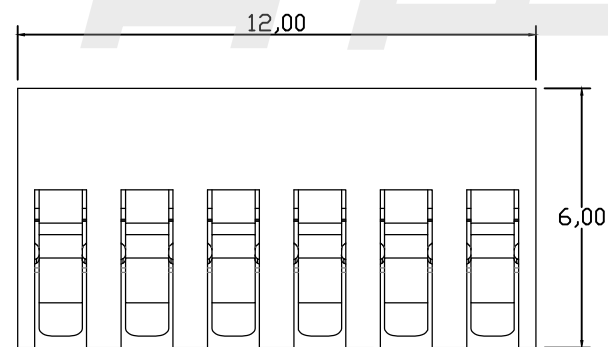
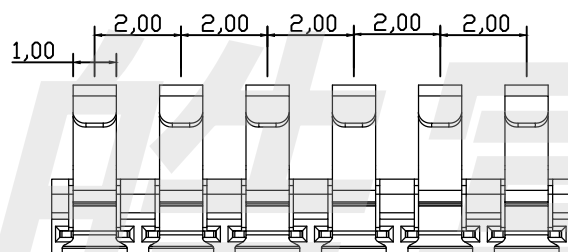


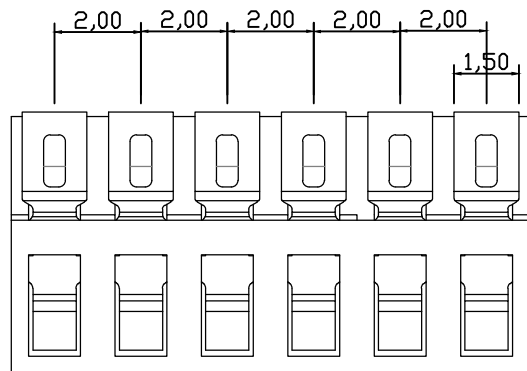

性能:

额定电流: 2.0A

额定电压: 12V

耐电压: 500V



接触电阻: 30mΩ

绝缘电阻: 500MΩ

工作温度: -40℃~+85℃

塑件(材质): LCP

接触点(材质): 磷铜, 镀金

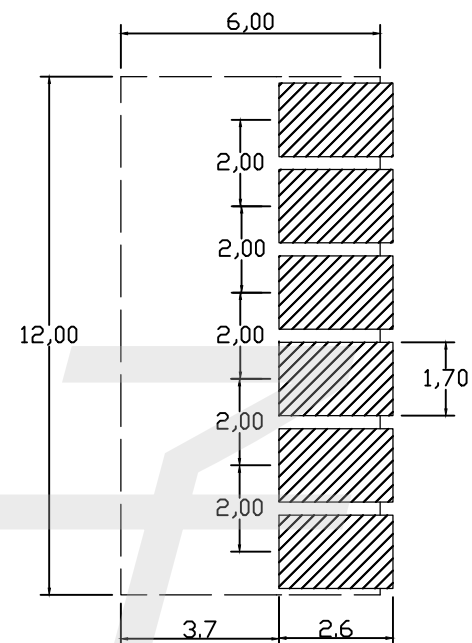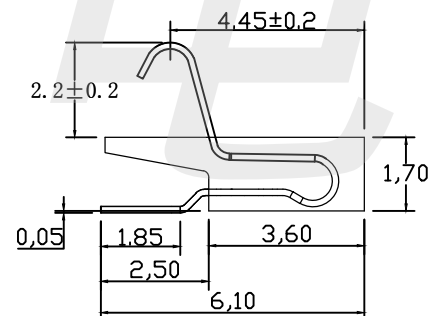

RECOMMENDED PCB LAYOUT

TOP VIEW(. XX±0.15)

HAOFU ELECTRONICS TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME

CONNECTOR

DRAWING

Y,C,ZHANG

DWG.No.

SBICL

PART NO.

BC6P20H39

CHECK

G.C.Chen

REV.

A1



UNIT :

mm

TOLERANCE
OTHERWISEUP TO 5
ABOVE 5~30
ABOVE 30
ANGLE±0.2
±0.3
±0.5
±3°

ANGLE

APPROVAL

SCALE

2:1

DATE

PAGE

12-01-2014

1 OF 1