
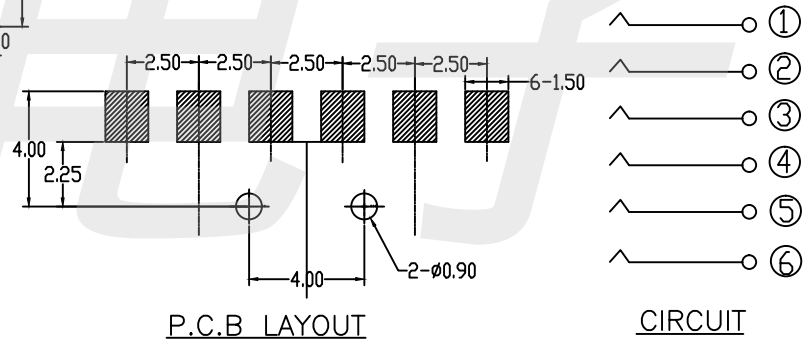
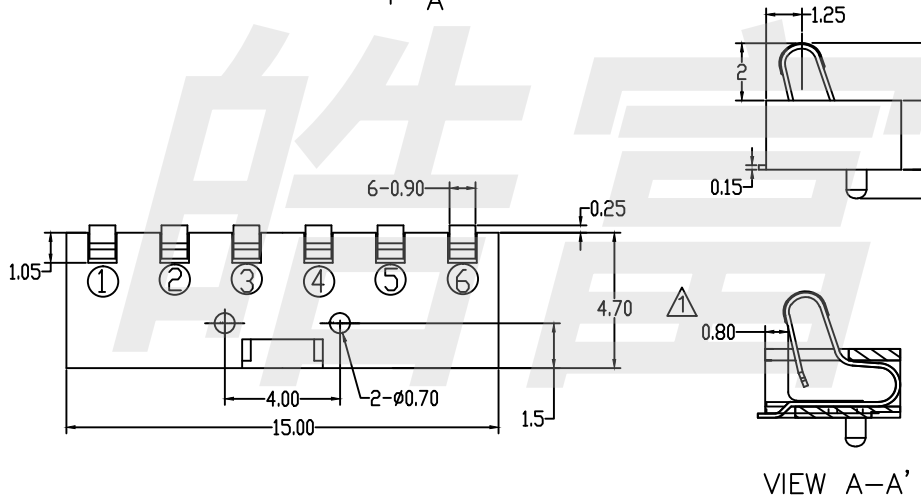


SPECIFICATIONS

1. ELECTRICAL CHARACTERISTICS:
 - 1-1.RATING: DC 12V 2A
 - 1-2.CONTACT RESISTANCE: 20mΩ MAX(INITAL)
 - 1-3.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
 - 1-4.INSULATION RESISTANCE: 100MΩ MIN, MEASURED BY 500V DC
2. LIFE TEST:MECHANICAL LIFE TEST 20,000 CYCLES.
3. TEMPERATURE RISE : 30°C MAX

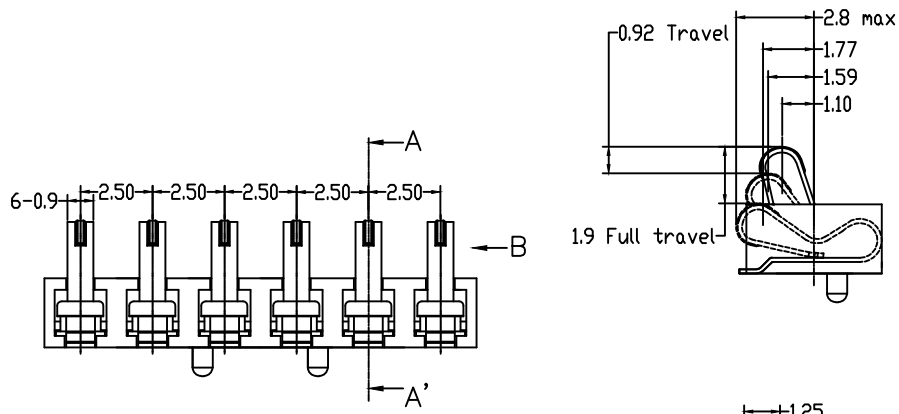

| | | | | |
|-----|------------------|----------|------|-----------|
| 2 | HOUSING | PPA | 1 | BLACK |
| 1 | CONTACT TERMINAL | BeCu | 6 | Au PLATED |
| NO. | PARTS | MATERIAL | QTY. | FINISHING |

HADFU ELECTRONCS TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

| | | | | | | | |
|-----------|------------------------|------------|------|---------|-----------|---------|------------|
| PART NAME | | CONNECTOR | | DRAWING | Y,C,ZHANG | DWG.No. | SBICL |
| PART NO. | | BC6P25H43 | | CHECK | G.C.Chen | REV. | A1 |
| UNIT : | TOLERANCE OTHERWISE | UP TO 5 | ±0.2 | ANGLE | APPROVAL | DATE | 28-06-2019 |
| | | ABOVE 5~30 | ±0.3 | | | | |
| mm | | ABOVE 30 | ±0.5 | 0°±3' | SCALE | PAGE | 1 OF 1 |
| | | ANGLE | ±3' | | | | |