


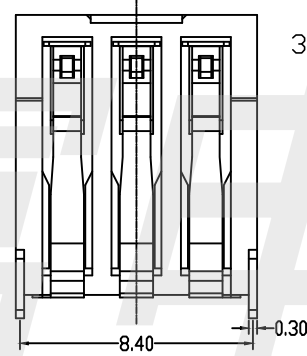
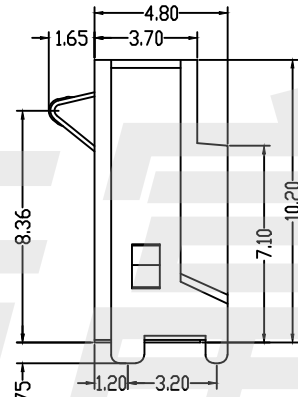



RoHS
Compliant



SPECIFICATIONS

- ELECTRICAL CHARACTERISTICS:
 - 1-1.RATING: DC 20V 3A max
 - 1-2.CONTACT RESISTANCE: 20mΩ MAX(INITAL)
 - 1-3.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
 - 1-4.INSULATION RESISTANCE: 100MΩ MIN, MEASURED BY 500V DC
- LIFE TEST:MECHANICAL LIFE TEST 10,000 CYCLES MIN
- TEMPERATURE RISE : 30°C MAX

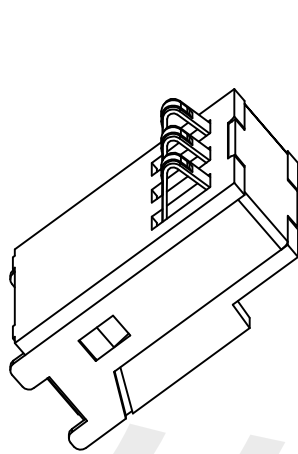

P.C.B LAYOUT

CIRCUIT



NO.	PARTS	MATERIAL	QTY.	FINISHING
2	HOUSING	LCP	1	BLACK
1	CONTACT TERMINAL	BeCu	3	3u"Au PLATED

HAOFU ELECTRONCS TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED PLEASE DO NOT COPY.

PART NAME		CONNECTOR		DRAWING	M.M.Zhang	DWG.No.	
PART NO.		CL-028S-3P		CHECK	G.C.Chen	REV. A0	
UNIT : mm	TOLERANCE	UP TO 5	±0.2	APPROVAL	SCALE	DATE	01-03-2017
	OTHERWISE	ABOVE 5 ~30	±0.3			ANGLE	PAGE
		ABOVE 30	±0.5		2:1		
		ANGLE	±3°				