


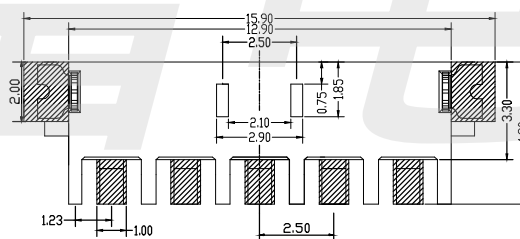
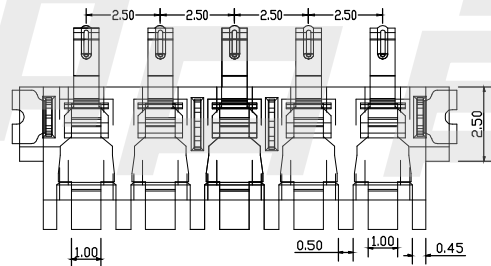



| PART No. | PIN | A | B | C |
|-----------|-----|------|------|------|
| CL-038-5P | 5P | 15.3 | 14.5 | 12.9 |
| CL-038-3P | 3P | 10.3 | 9.5 | 7.9 |




性能:

- 额定电流: 2.0A
- 额定电压: 12V
- 耐电压: 500V
- 接触电阻: 30mΩ
- 绝缘电阻: 500MΩ
- 工作温度: -40℃~+85℃
- 塑件(材质): LCP
- 接触点(材质): 磷铜, 镀金

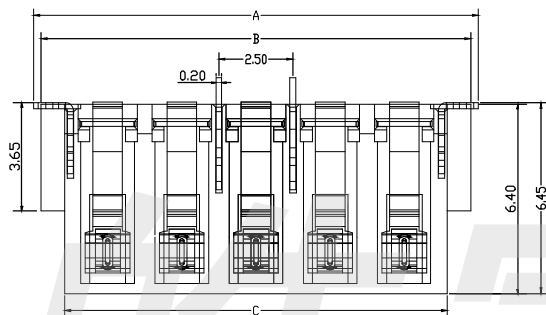

PCB LAYOUT (5pin)

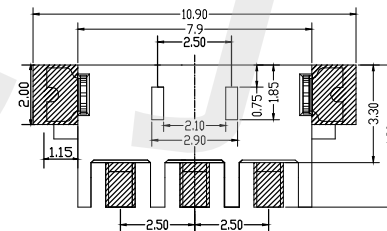

PCB LAYOUT (3pin)

| | | | | |
|-----|----------|----------|------|-----------|
| 3 | PEG | BRASS | 1 | Sn PLATED |
| 2 | HOUSING | LCP | 1 | BLACK |
| 1 | TERMINAL | C5210 | X | Au PLATED |
| NO. | PARTS | MATERIAL | QTY. | FINISHING |

HAOFU ELECTRONICS TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

| PART NAME | | CONNECTOR | | DRAWING | Y,C,ZHANG | DWG.No. | SBICL |
|--------------|------------------------|--|-----------------------------|----------|-----------|---------|------------|
| PART NO. | | CL-038 | | CHECK | G.C.Chen | REV. | A1 |
| UNIT : mm | TOLERANCE OTHERWISE | UP TO 5 ABOVE 5~30 ABOVE 30 ANGLE | ±0.2 ±0.3 ±0.5 ±3° | APPROVAL | | DATE | 14-03-2013 |
| | | ANGLE | 0°±3° | SCALE | 2:1 | PAGE | 1 OF 1 |