
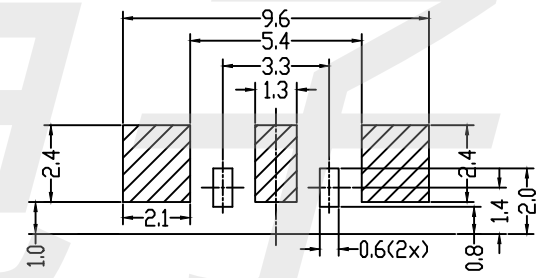

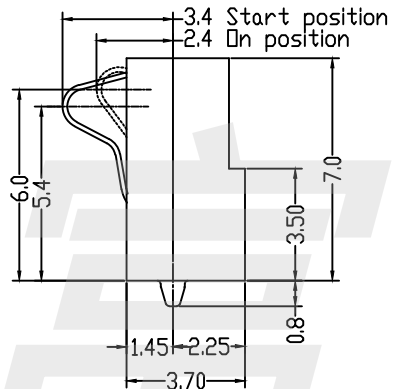
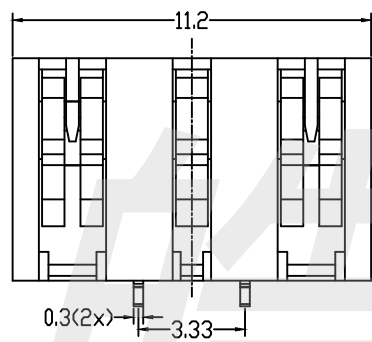



SPECIFICATIONS

1. ELECTRICAL CHARACTERISTICSΩ
 - 1-1.RATING: DC 12V 2A
 - 1-2.CONTACT RESISTANCE: 20m MAX(INITAL)
 - 1-3.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
 - 1-4.INSULATION RESISTANCE: 100M MIN, MEASURED BY 500V DC
2. LIFE TEST:MECHANICAL LIFE TEST 10,000 CYCLES.

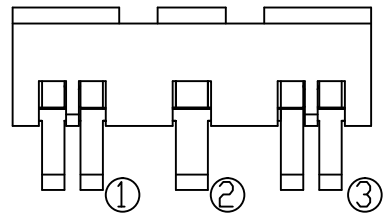

CIRCUIT

P.C.B LAYOUT

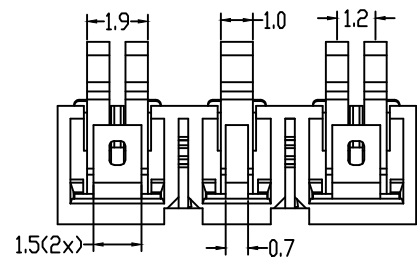

3	HOUSING	LCP	1	BLACK
2	EARTH TERMINAL	C2680	1	Sn PLATED
1	CONTACT TERMINAL	BeCu	3	Au PLATED
NO.	PARTS	MATERIAL	QTY.	FINISHING

HADFU ELECTRONCS TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		CONNECTOR		DRAWING	Y,C,ZHANG	DWG.No.	SBICL
PART NO.		CL-039S		CHECK	G.C.Chen	REV.	A1
UNIT : mm	TOLERANCE OTHERWISE	UP TO 5	±0.2	ANGLE	APPROVAL	DATE	16-08-2017
		ABOVE 5~30	±0.3				
		ABOVE 30	±0.5				
		ANGLE	±3'				