
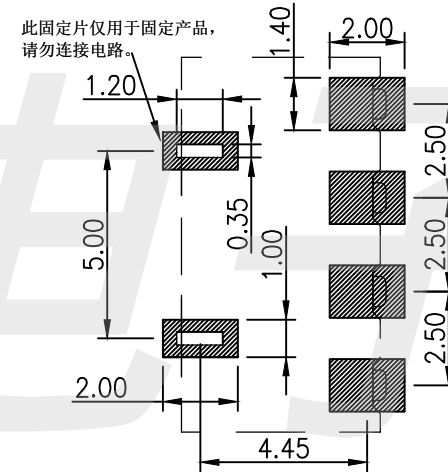
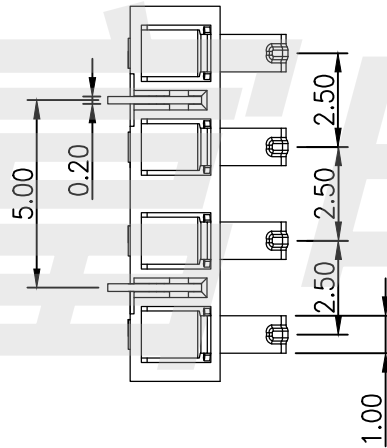
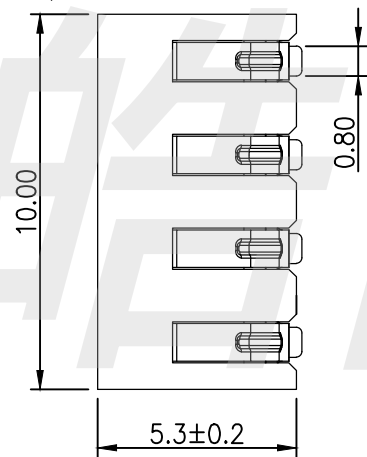
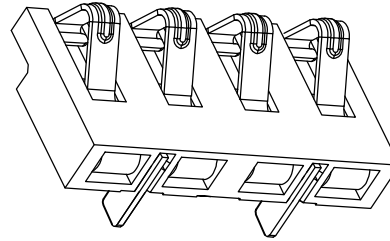


RoHS
Compliant

性能:

额定电流: 2.0A
 额定电压: 12V
 耐电压: 500V
 接触电阻: 30mΩ 以内
 绝缘电阻: 500MΩ
 工作温度: -40℃~+85℃
 塑件(材质): LCP 黑色
 接触点(材质): 铜合金, 触点镀金3U"

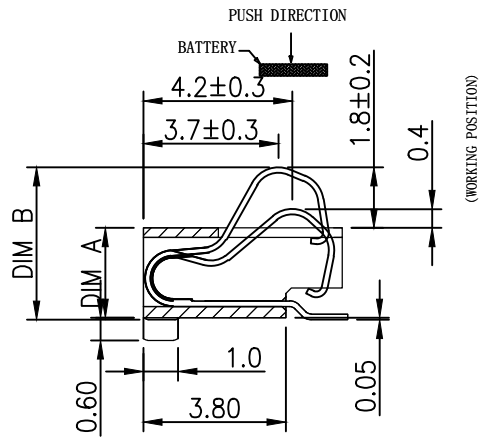

RECOMMENDED PCB LAYOUT
TOP VIEW(. XX±0.05)

PART NO.	DIM A	DIM B
BC4P25H24F-C06	2.4	4.20±0.2
BC4P25H30F-C06	3.0	4.80±0.2
BC4P25H35F-C06	3.5	5.30±0.2

HAOFU ELECTRONICS TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		CONNECTOR		DRAWING	Y,C,ZHANG	DWG.No.	SBICL
PART NO.		BC4P25HXXF-C06		CHECK	G.C.Chen	REV.	A1
UNIT : mm	TOLERANCE OTHERWISE	UP TO 5	±0.2	ANGLE	APPROVAL	DATE	PAGE
		ABOVE 5 ~30	±0.3				
		ABOVE 30	±0.5	SCALE	2:1		
		ANGLE	±3'				