

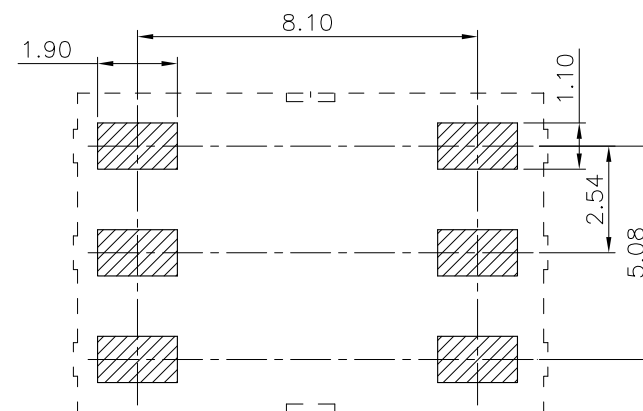
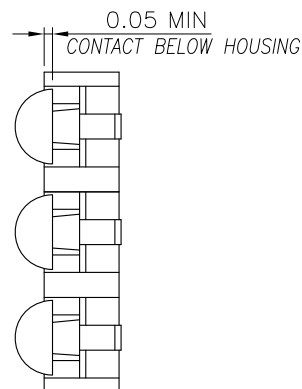


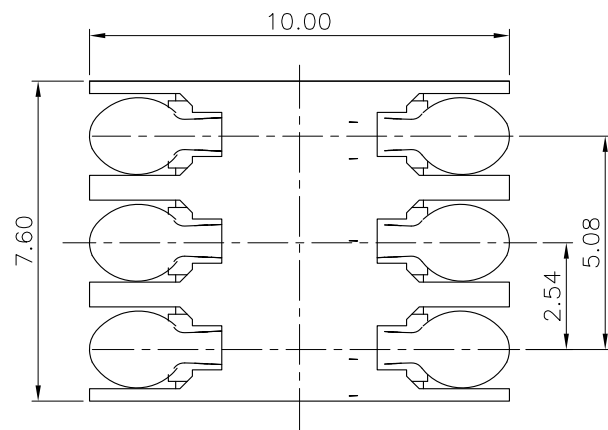

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05

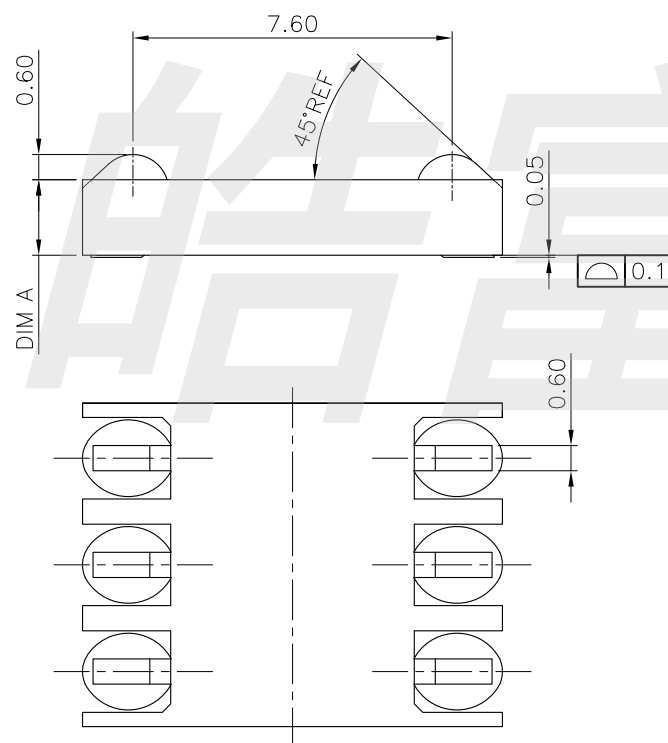

DIMENSION INFORMATION

DIM.A	P/N
1.50	BC6P254H15
1.80	BC6P254H18
2.00	BC6P254H20

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS

- 1-1. CONTACT RESISTANCE: 80 milliohms MAX.
- 1-2. INSULATION RESISTANCE: 1,000 Megohms MIN.
- 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.

2. MECHANICAL CHARACTERISTICS

- 2-1. RETENTION FORCE: MIN. 100gf/PIN
- 2-2. DURABILITY: 5,000 CYCLES

3. RoHS 2002/95/EC COMPLIANT.

HAOFU ELECTRONICS TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME

CONNECTOR

DRAWING

Y,C,ZHANG

DWG.No.

SBICL

PART NO.

BC6P254XX

CHECK

G.C.Chen

REV.

A1

UNIT :
mmTOLERANCE
OTHERWISE

UP TO 5
ABOVE 5 ~ 30
ABOVE 30
ANGLE

± 0.2
 ± 0.3
 ± 0.5
 $\pm 3^\circ$

APPROVAL

SCALE

2:1

DATE

22-03-2011

PAGE

1 OF 1