

性能:

额定电流: 2.0A






额定电压: 12V

耐电压: 500V

接触电阻: 30m Ω 绝缘电阻: 500M Ω 工作温度: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$

塑件(材质): LCP 黑色

接触点(材质): 铜合金

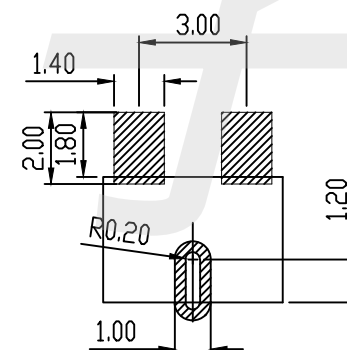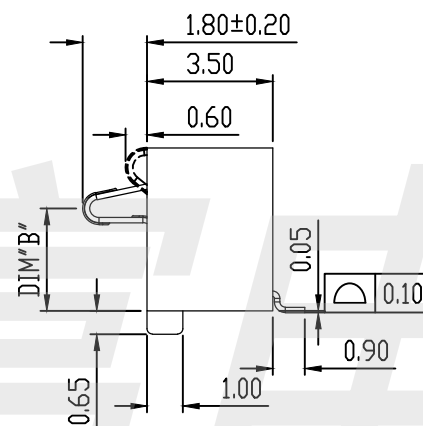

规格型号	DIM A	DIM B
BC2P30H72-C06	7.2	5.5
BC2P30H65-C06	6.5	4.8
BC2P30H50-C06	5.0	3.3
BC2P30H46-C06	4.6	2.9

RECOMMENDED PCB LAYOUT
TOL:(<±0.05)

HAOFU ELECTRONICS TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME

CONNECTOR

DRAWING

Y,C,ZHANG

DWG.No.

SBICL

PART NO.

BC2P30HXX-C06

CHECK

G.C.Chen

REV.

A1

UNIT :
mmTOLERANCE
OTHERWISEUP TO 5
ABOVE 5 ~30
ABOVE 30
ANGLE±0.2
±0.3
±0.5
±3°ANGLE
0°±3°

APPROVAL

SCALE

DATE

PAGE

1 OF 1