

性能:

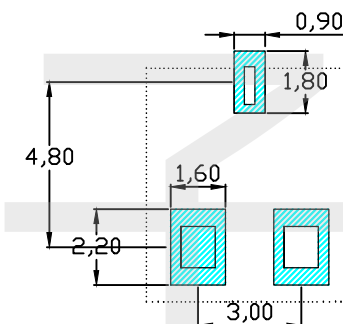

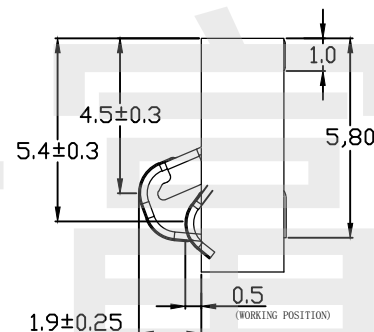



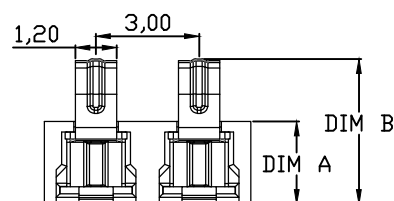
额定电流: 3.0A

额定电压: 24V

耐电压: 500V

接触电阻: $30\text{m}\Omega$ MAX绝缘电阻: $500\text{M}\Omega$ 工作温度: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$ 塑件(材质): LCP, 耐高温 260°C

接触点(材质): 铜合金, 触点镀金3U

RECOMMENDED PCB LAYOUT
TOP VIEW (.XX±0.05)

PART NO.	DIM A	DIM B
BC2P30H24-C06	2.4	4.30 ± 0.25
BC2P30H35-C06	3.5	5.40 ± 0.25

HAOFU ELECTRONICS TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME

CONNECTOR

DRAWING

Y,C,ZHANG

DWG.No.

SBICL

PART NO.

BC2P30HXX-C06

CHECK

G.C.Chen

REV.

A1

UNIT :
mmTOLERANCE
OTHERWISEUP TO 5
ABOVE 5 ~ 30
ABOVE 30
ANGLE±0.2
±0.3
±0.5
±3°

APPROVAL

SCALE

DATE

PAGE

1 OF 1