
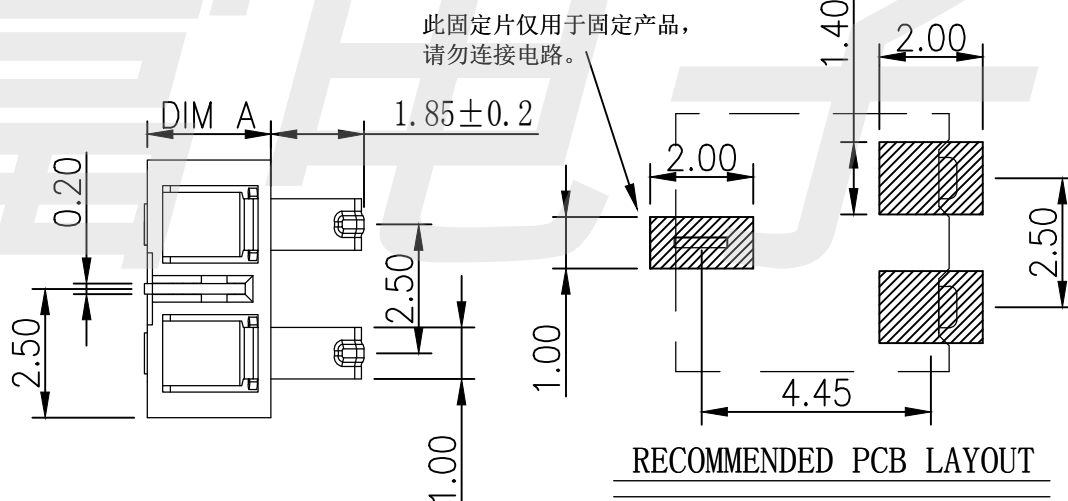
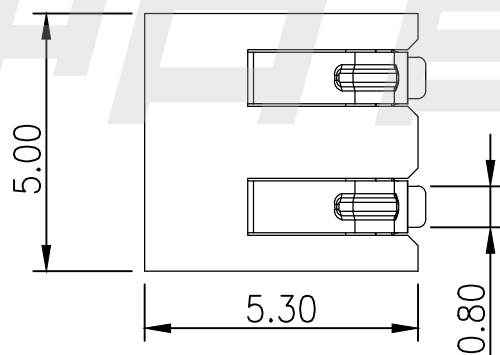


性能:

额定电流: 3.0A
 额定电压: 12V
 耐电压: 500V
 接触电阻: 30mΩ
 绝缘电阻: 500MΩ
 工作温度: -40℃~+85℃
 塑件(材质): LCP 黑色
 接触点(材质): 铜合金, 触点镀金3U"

PART NO.	DIM A	DIM B
BC2P25H24F	2.4	4.30 ± 0.2
BC2P25H30F	3.0	4.90 ± 0.2
BC2P25H35F	3.5	5.40 ± 0.2

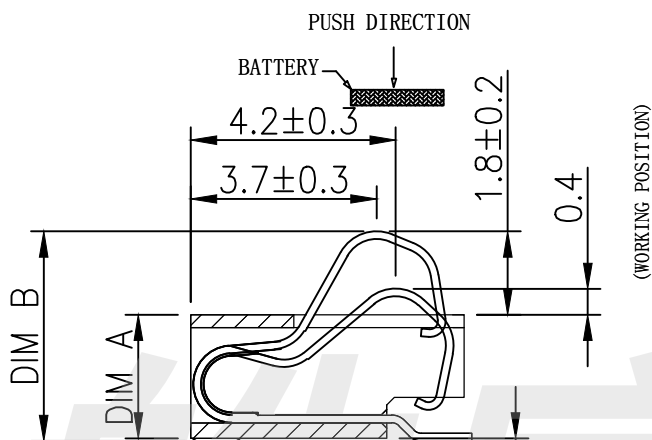

RECOMMENDED PCB LAYOUT
TOP VIEW (.XX ± 0.05)

HAOFU ELECTRONICS TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		CONNECTOR		DRAWING	Y,C,ZHANG	DWG.No.	SBICL
PART NO.		BC2P25HXXF		CHECK	G.C.Chen	REV.	A1
UNIT : mm	TOLERANCE OTHERWISE	UP TO 5	±0.2	ANGLE	APPROVAL	DATE	
		ABOVE 5 ~ 30	±0.3				
		ABOVE 30	±0.5	0°±3'	SCALE	PAGE	1 OF 1
		ANGLE	±3'		2:1		