




RoHS
Compliant

SYMBOL	REVISION	APPROVAL	DATE

SPECIFICATIONS

- ELECTRICAL CHARACTERISTICS:
 - 1-1.RATING: DC 12V 3A
 - 1-2.CONTACT RESISTANCE: 20mΩ MAX(INITAL)
 - 1-3.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
 - 1-4.INSULATION RESISTANCE: 100MΩ MIN, MEASURED BY 500V DC
- FORCE:0.6mm CONTACT TRAVEL:600gf Max.
- LIFE TEST:MECHANICAL LIFE TEST 20,000 CYCLES.
- TEMPERATURE RISE : 30°C MAX

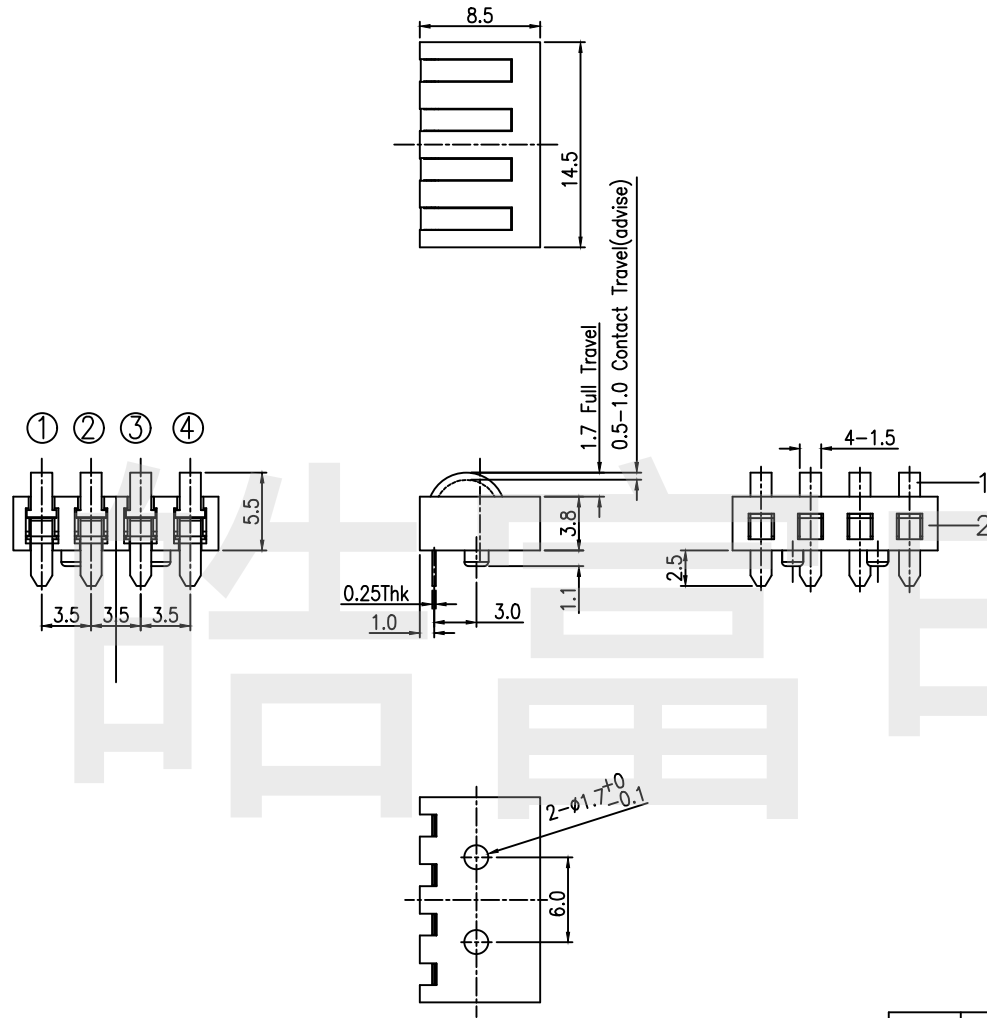

2	HOUSING	PPA	1	BLACK
1	CONTACT TERMINAL	C70350	4	Au PLATED
NO.	PARTS	MATERIAL	QTY.	FINISHING

HAOFU ELECTRONCS TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	CONNECTOR		DRAWING	G.C.Chen	DWG.No.	SBICL5
PART NO.	CL-005-4P		CHECK	G.C.Chen	REV.	A0
UNIT :	TOLERANCE	UP TO 5	ANGLE	APPROVAL	DATE	08-01-2016
mm	OTHERWISE	ABOVE 5 ~30	0°±3'	SCALE	PAGE	1 OF 1
		±0.2		2:1		
		±0.3				
		±0.5				
		±3'				