



Rating	DC30V 100mA	Electrical Life	300,000 cycles
Contact Resistance	500mΩ Max	Mechanical Life	300,000 cycles
Insulation Resistance	>100MΩ DC500V	Ambient Temper. Used	-25℃ to +85℃
Withstand Voltage	AC500V 1min.	Ambient Humidity Used	≤85% at +40℃
Soldering Temper.	235±5℃ 5s	Operating Force	110±30gf

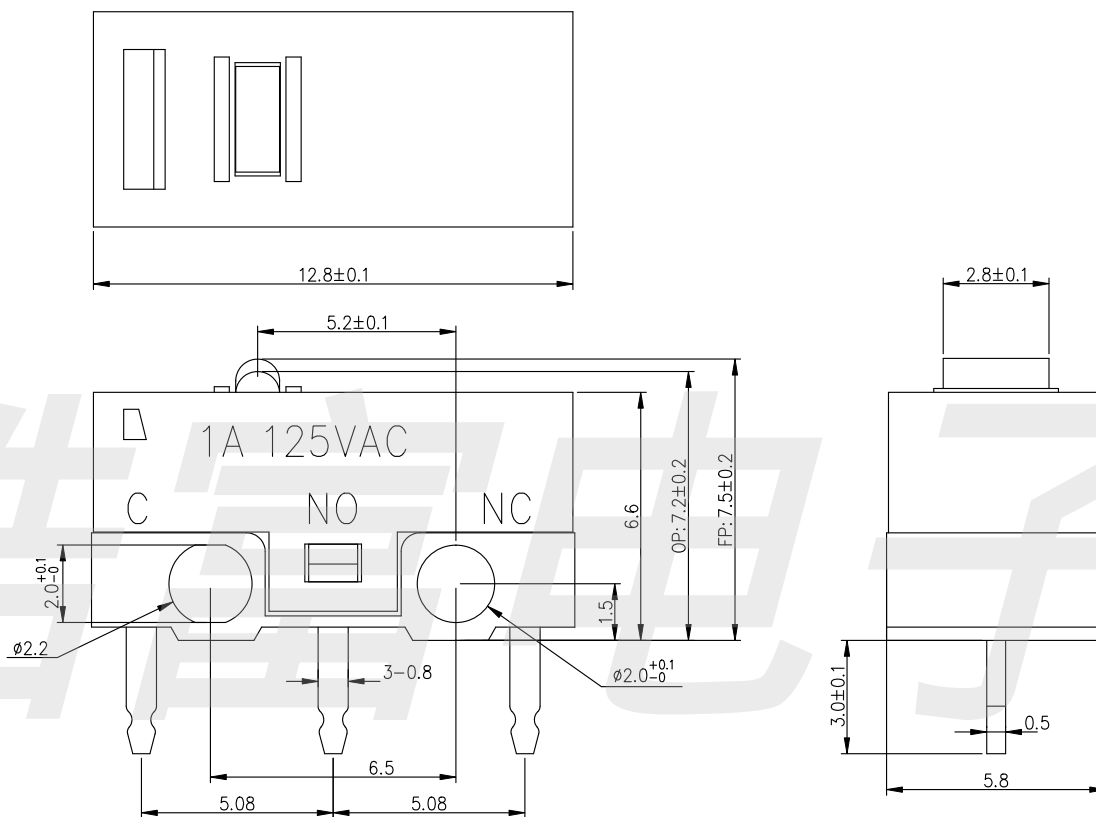

6	触点	银合金	
5	端子	C2680	镀银
4	弹片	C5210	
3	按钮	PBT	
2	上盖	PBT	
1	底座	PBT	
序号	名称	材料	备注

DRAWING NO.				MODIFIED REMEMBER	
MODEL NAME		DM1-00P-110-3		1	
TOLERANCE		±0.2		2	
Triangle Method				3	
UNIT		m.m.		4	
EDITION		B/0		5	
HAOFU ELECTRONICS TECHNOLOGY CO.,LTD					
DRAWN		CHECKED		APPROVED	