



|                       |               |                       |                  |
|-----------------------|---------------|-----------------------|------------------|
| Rating                | DC30V 100mA   | Electrical Life       | 1,000,000 cycles |
| Contact Resistance    | 100mΩ Max     | Mechanical Life       | 1,000,000 cycles |
| Insulation Resistance | >100MΩ DC500V | Ambient Temper. Used  | -25℃ to +85℃     |
| Withstand Voltage     | AC500V 1min.  | Ambient Humidity Used | ≤85% at +40℃     |
| Soldering Temper.     | 235±5℃ 5s     | Operating Force       | 110±30gf         |

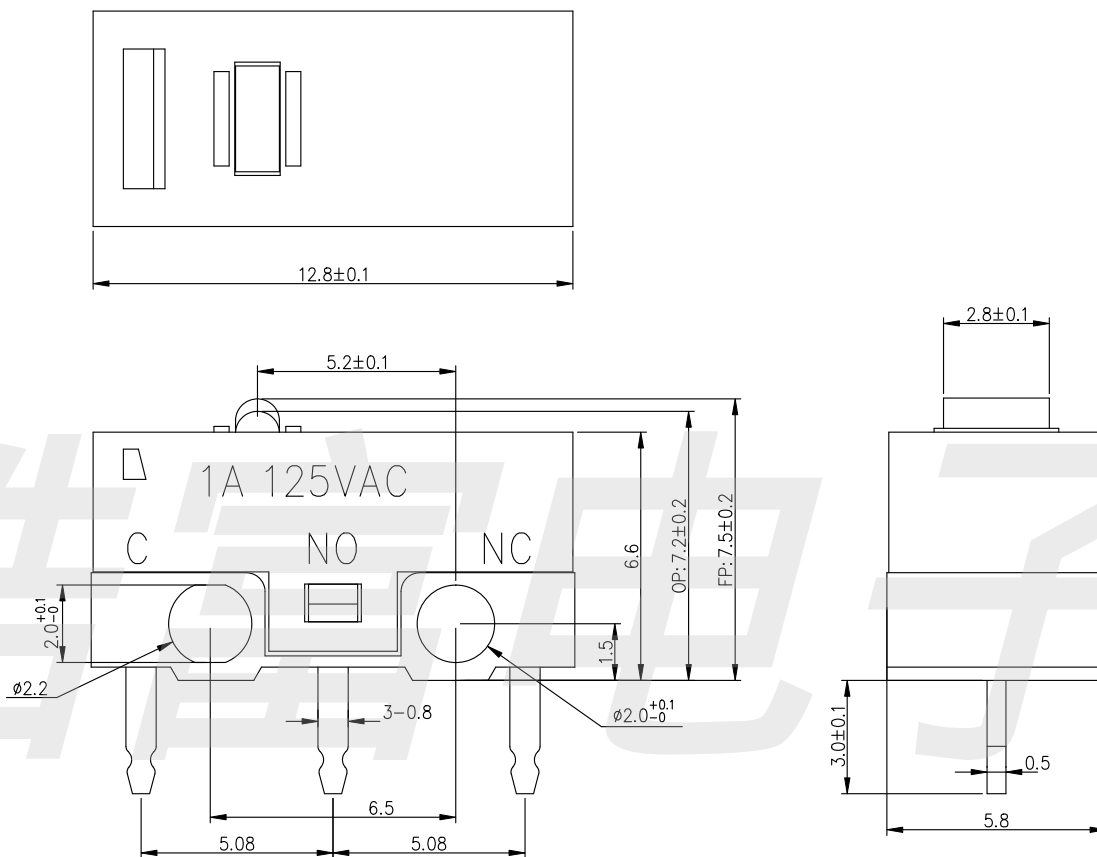

2019年3月升级版：  
100万次机械寿命  
可靠性增强型

|    |    |       |    |
|----|----|-------|----|
| 6  | 触点 | 银合金   |    |
| 5  | 端子 | C2680 | 镀银 |
| 4  | 弹片 | 进口铜合金 |    |
| 3  | 按钮 | PBT   |    |
| 2  | 上盖 | PBT   |    |
| 1  | 底座 | PBT   |    |
| 序号 | 名称 | 材料    | 备注 |

|                                      |  |               |  |                   |  |
|--------------------------------------|--|---------------|--|-------------------|--|
| DRAWING NO.                          |  |               |  | MODIFIED REMEMBER |  |
| MODEL NAME                           |  | DM1-00P-110-3 |  | 1                 |  |
| TOLERANCE                            |  | ±0.2          |  | 2                 |  |
| Triangle Method                      |  |               |  | 3                 |  |
| UNIT                                 |  | m.m.          |  | 4                 |  |
| EDITION                              |  | A/0           |  | 5                 |  |
| HAOFU ELECTRONICS TECHNOLOGY CO.,LTD |  |               |  |                   |  |
| DRAWN                                |  | CHECKED       |  | APPROVED          |  |