
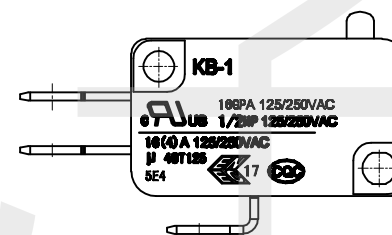

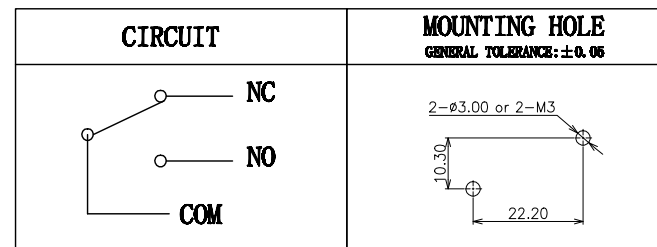

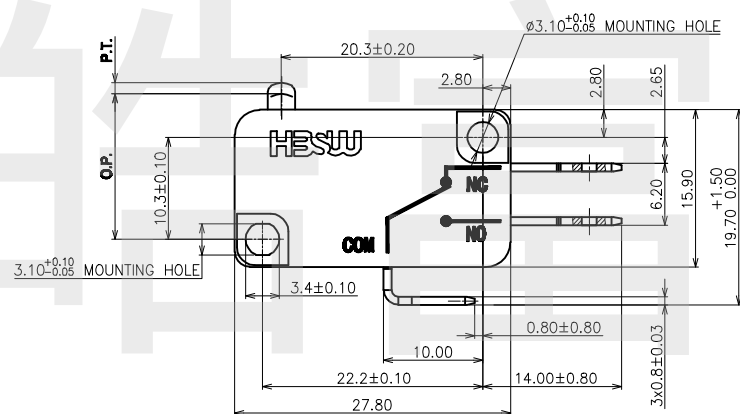


NOTES:

- 1 MOUNTING HOLES WILL ACCEPT $\phi 3$ MAX PINS OR SCREWS.
- 2 - TERMINALS WILL ACCEPT 4.7 WIDE QUICK CONNECT RECEPTACLES AND COMPLY WITH EN61058-1 REQUIREMENTS.

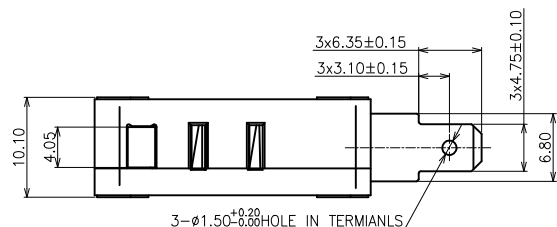

CHARACTERISTICS	ELECTRICAL DATA
OPERATING FORCE: 300 gf max.	CONTACT ARRANGMENT SPDT
DIFFERENTIAL FORCE:	
RELEASE FORCE: 50 gf min.	
FREE POSITION:	
OPERATING POSITION: 14.7±0.50 mm	10(4)A 125/250V-5E4 40T125 μ
PRE-TRAVEL: 1.60 mm max.	10(4)A 125/250V-5E4 40T125 μ
DIFFERENTIAL TRAVEL: 0.40 mm max.	100PA 125/250VAC 1/2HP 125/250VAC
OVER-TRAVEL: 0.80 mm min.	
FULL OVERTRAVEL FORCE:	

HAOFU ELECTRONICS TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME

Micro Switch

DRAWING

Y,C,ZHANG

DWG.No.

SBICL

PART NO.

KB-16-00N-300-1

CHECK

G.C.Chen

REV.

A1



UNIT :

mm

TOLERANCE
OTHERWISEUP TO 5
ABOVE 5 ~30
ABOVE 30
ANGLE ± 0.2
 ± 0.3
 ± 0.5
 $\pm 3^\circ$

ANGLE

 $0^\circ \pm 3^\circ$

APPROVAL

SCALE

2:1

DATE

PAGE

1 OF 1