

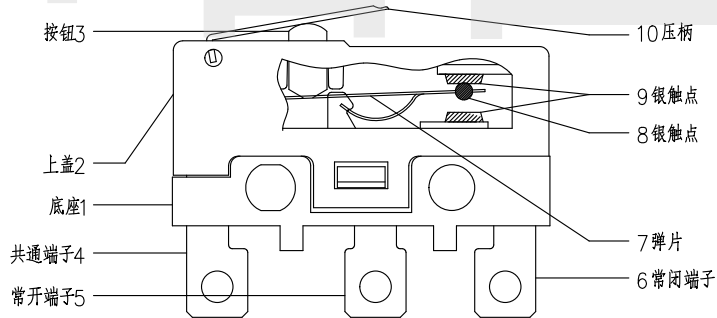
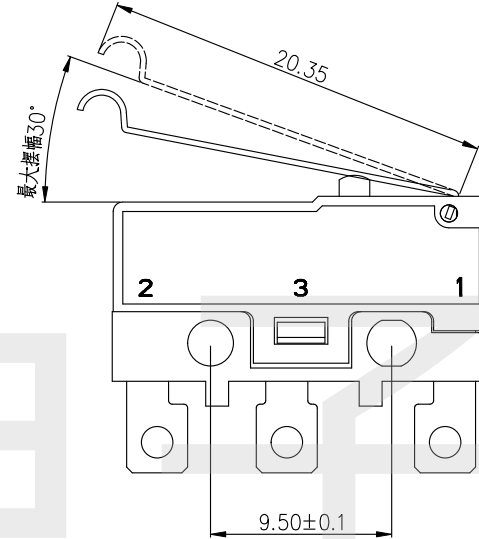
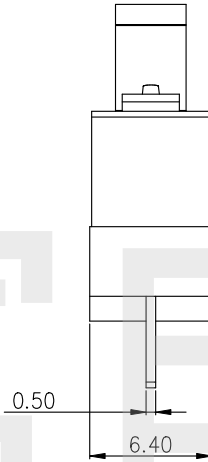


防止焊接时助焊剂进入开关内部
平行产品本体脚形简化自动化焊接工艺

Rating	5 A 125/250VAC	Mechanical Life	1,000,000 cycles
Contact Resistance	100mΩ Max	Electrical Life	10,000 cycles
Insulation Resistance	>100MΩ DC500V	Ambient Temper. Used	-25℃ to +125℃
Withstand Voltage	AC1500V 1min.	Ambient Humidity Used	≤85% at +40℃
Soldering Temper.	235±5℃ 5s	Operating Force	40 ±20gf

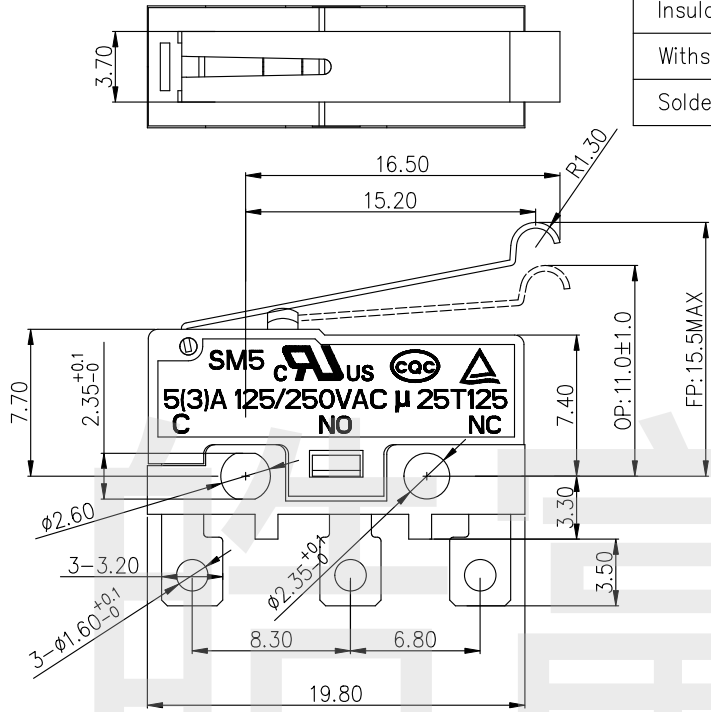

序号	零件名称	数量	材质	备注
10	压柄	1	不锈钢	
9	端子触点	2	银合金	
8	弹片触点	1	银合金	
7	弹片	1	C5210	
6	NC端子	1	C2680	镀银
5	NO端子	1	C2680	镀银
4	COM端子	1	C2680	镀银
3	按钮	1	PBT	UL94V-0
2	上盖	1	PBT	UL94V-0
1	底座	1	PBT	UL94V-0

制图 DRAWN					东莞市皓富电子科技有限公司				
设计 DESIGN					中型微动开关				
审核 CHECKED			比例 SCALE	4:1	名称 TITLE	SM5-02N-40-3			
批准 APPROVE			张数 SHEET	1/1	料号 P/N NO.				
公差 TOLERANCE			单位 UNIT	mm	规格编号 P/N NO.				
			角度 ANGLES	±2.0°	数量 SIZE	A4	画法 P R O J.		工程 ENG DRAW