


ELECTRICAL CHARACTERISTICS

- 1. RATING: DC 30V 0.1A
- 2. CONTACT RESISTANCE: 100mΩ MAX
- 3. INSULATION RESISTANCE: 100MΩ MIN
- 4. DIELECTRIC STRENGTH: AC 250V (50~60Hz)/60S

MECHANICAL CHARACTERISTICS

- 1. PRACTICAL TEMPERATURE RANG: -40℃~+85℃
- 2. OPERATING FORCE: 180±50gf
- 3. MECHANICAL LIFE: 30,000 cycles

8				
7	TERMINAL	BRASS STRIP	6	Ag PLATED
6	CASE	PA66	1	GRAY
5	LOCK PIN	SUS WIRE	1	NATURAL
4	SPRING	SUS WIRE	1	NATURAL
3	CONTACT	BRONZE	2	Ag PLATED
2	KNOB	PBT	1	WHITE
1	COVER	PPA	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING

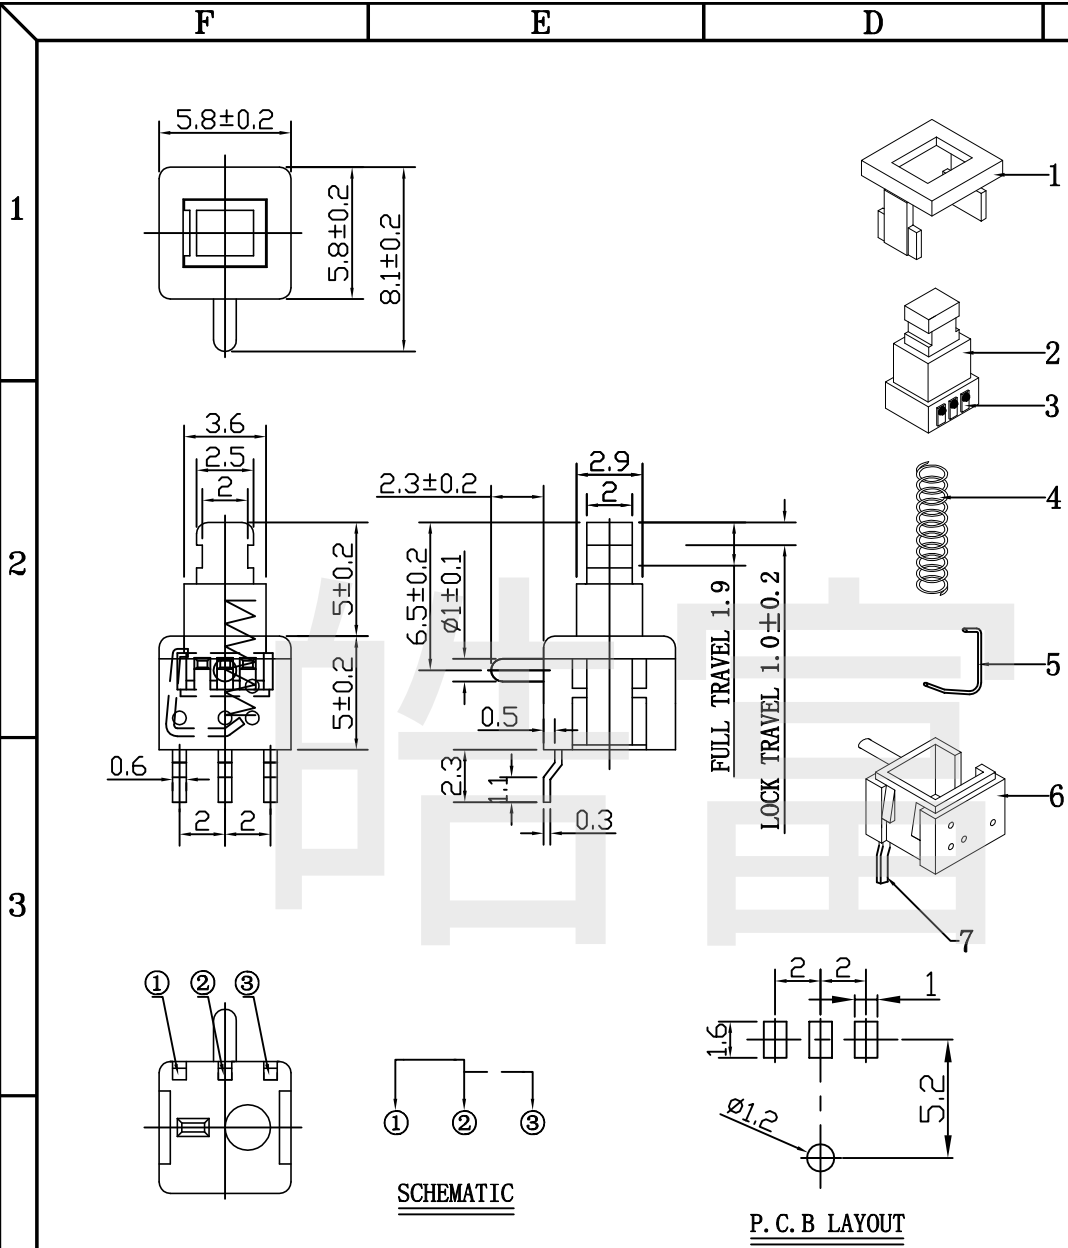

HAOFU ELECTRONCS TECHNOLOGY CO., LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		PUSH SWITCH				DRAWING	Y,C,ZHANG	DWG.No.	SBICL
PART NO.		PB22E60L180SQ				CHECK	G.C.Chen	REV.	A1
	UNIT :	TOLERANCE OTHERWISE	UP TO 5	±0.2	APPROVAL	DATE	PAGE	1 OF 1	
	mm		ABOVE 5 ~30	±0.3					
			ABOVE 30	±0.5					
			ANGLE	±3°	SCALE	2:1			