








ELECTRICAL CHARACTERISTICS

1. RATING: DC 50V 0.5A
2. CONTACT RESISTANCE: $100\text{m}\Omega$ MAX
3. INSULATION RESISTANCE: $100\text{M}\Omega$ MIN
4. DIELECTRIC STRENGTH: AC 250V (50~60Hz)/60S



MECHANICAL CHARACTERISTICS

1. PRACTICAL TEMPERATURE RANG: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$
2. OPERATING FORCE: $180\pm 50\text{gf}$
3. MECHANICAL LIFE: 30,000 cycles


8				
7				
6	TERMINAL	BRASS STRIP	6	Ag PLATED
5	CASE	PA66	1	GRAY
4	SPRING	SUS WIRE	1	NATURAL
3	CONTACT	BRONZE	2	Ag PLATED
2	KNOB	PBT	1	WHITE
1	COVER	PPA	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING

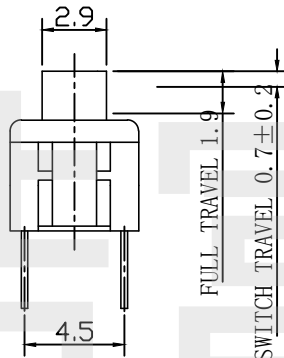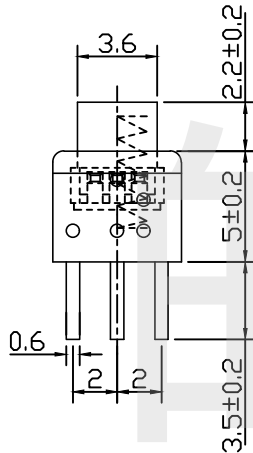

FULL TRAVEL 1.9
SWITCH TRAVEL 0.7±0.2



SCHEMATIC



P. C. B LAYOUT

HAOFU ELECTRONCS TECHNOLOGY CO., LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		PUSH SWITCH		DRAWING	Y,C,ZHANG	DWG.No.	SBICL
PART NO.		PB22E65NL		CHECK	G.C.Chen	REV.	A1
	UNIT : mm	TOLERANCE OTHERWISE	UP TO 5 ±0.2	ANGLE 0°±3°	APPROVAL	DATE	PAGE
			ABOVE 5~30 ±0.3				
	mm	TOLERANCE OTHERWISE	ABOVE 30 ±0.5	SCALE	2:1	1 OF 1	
			ANGLE ±3°				