











ELECTRICAL CHARACTERISTICS

1. RATING: DC 50V 0.5A
2. CONTACT RESISTANCE: $100\text{m}\Omega$ MAX
3. INSULATION RESISTANCE: $100\text{M}\Omega$ MIN
4. DIELECTRIC STRENGTH: AC 250V(50~60Hz)/60S

MECHANICAL CHARACTERISTICS

1. PRACTICAL TEMPERATURE RANG: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
2. OPERATING FORCE: $250 \pm 50\text{gf}$
3. MECHANICAL LIFE: 10,000 cycles

8				
7	HAT	SILICA GEL	1	TRANSPARENT
6	TERMINAL	BRASS	6	Ag PLATED
5	CASE	PA66	1	GRAY
4	SPRING	SUS WIRE	1	NATURAL
3	CONTACT	BRONZE	2	Ag PLATED
2	KNOB	PBT	1	WHITE
1	COVER	PPA	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING

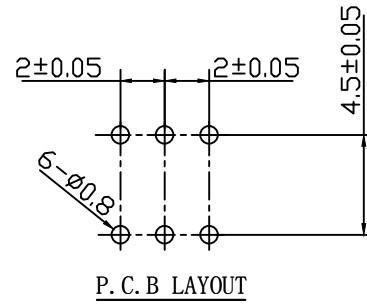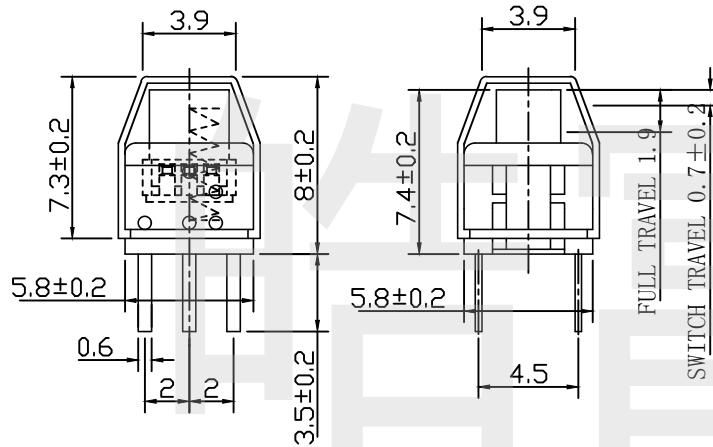

HAOFU ELECTRONCS TECHNOLOGY CO., LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		PUSH SWITCH		DRAWING	Y,C,ZHANG	DWG.No.	SBICL
PART NO.		PB22E64NLGJ		CHECK	G.C.Chen	REV.	A1
UNIT :	mm	TOLERANCE OTHERWISE	UP TO 5 ABOVE 5~30 ABOVE 30 ANGLE	ANGLE 0°±3°	APPROVAL	DATE	PAGE
					SCALE	2:1	1 OF 1