

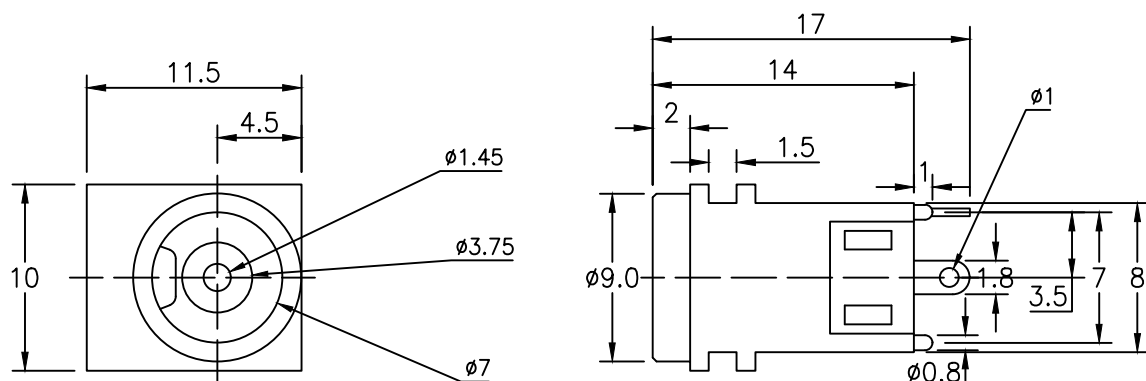





NOTES:

- 1.ELECTRIC CHARACTERISTICS:
1-1.CONTACT CURRENT RATING: 4A.
1-2.CONTACT VOLTAGE RATING: 20V DC.
1-3.CONTACT RESISTANCE: 30mΩ MAX.;
1-4.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC;
1-5.INSULATION RESISTANCE: 100MΩ MIN.AT DC 500V.
2.MECHANICAL CHARACTERISTICS:
2-1.DURABILITY:3000 CYCLES.
2-2.INSERTION AND EXTRACTION FORCE:
2-2.1.INSERTION FORCE: 30N MAX.
2-2.2.EXTRACTION FORCE: 3N MIN.
3.ENVIRENMENT CHARACTERISTICS:
3-1.OPERATING TEMPERATURE:-25℃~+85℃.
3-2.HUMIDTY:45~85% RH.

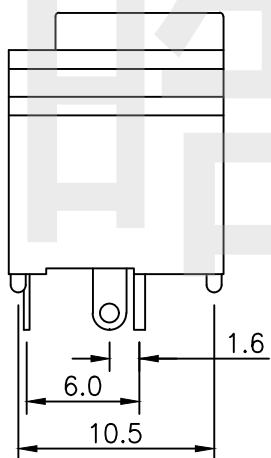

ELECTRICAL SCHEMATIC



5	底座	1	LCP	BLACK
4	盖脚	1	磷铜 T=0.2mm	Ag PLATED
3	开关静片	1	黄铜 T=0.25mm	Ag PLATED
2	开关弹片	1	磷铜 T=0.3mm	Ag PLATED
1	电极中心柱	1	黄铜	CuSn PLATED
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR

HAOFU ELECTRONCS TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	DC POWER JACK			DRAWING	G.C.Chen	DWG.No.	
PART NO.	DC-037			CHECK	G.C.Chen	REV.	A
	UNIT :	TOLERANCE	UP TO 10	ANGLE	APPROVAL	DATE	
	mm	OTHERWISE	ABOVE 10~ 20 ±0.15 ABOVE 20~ 50 ±0.2	0°±3'	SCALE	PAGE	1 OF 1