

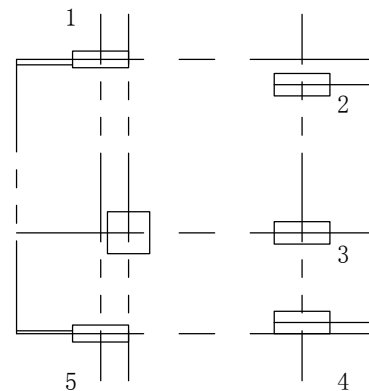
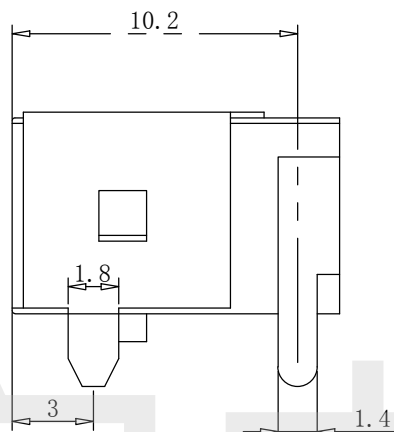


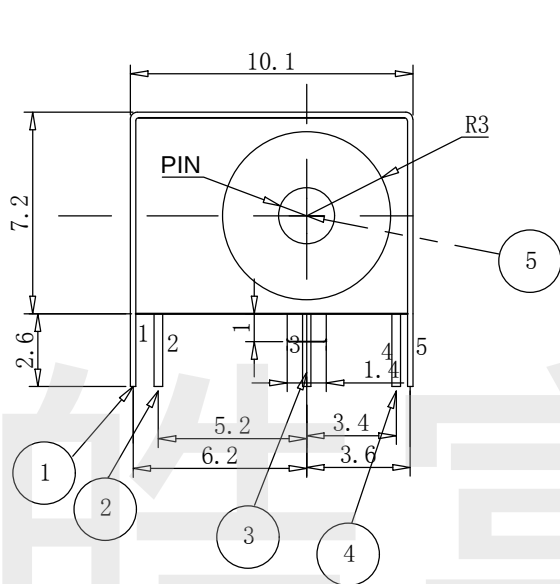

按点示意图
SCHEMATIC

PIN	Φ 2.0	Φ 2.35	Φ 2.5
APPD.			



主要技术特性:

- 额定电负荷: DC 12V, 1A;
- 接触电阻: $\leq 30\text{m}\Omega$;
- 绝缘电阻: $\geq 100\text{M}\Omega$;
- 耐压: AC500V (50-60HZ) 1min;
- 插拔力: 2.94-29.4N;
- 寿命: 5,000次。

主要技术要求

- 未注线性公差:
0.0-10.0mm $\pm 0.20\text{mm}$
10.0-20.0mm $\pm 0.25\text{mm}$
20.0-50.0mm $\pm 0.30\text{mm}$
- 外观应良好, 无锈蚀、裂痕、电镀不良等现象。

6	基座	1	PBT	(黑)
5	PIN	1	H59黄铜棒	Ni
4	平片	1	H62黄铜带T=0.4t	银
3	弯片	1	H62黄铜带T=0.4t	银
2	簧片	1	Qsn6.5-0.1	银
1	盖脚	1	H62黄铜带T=0.2t	银
序号	名称	数量	材料	镀涂

HAOFU ELECTRONCS TECHNOLOGY CO., LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	DC POWER JACK	DRAWING	Y,C,ZHANG	DWG.No.	SBICL
PART NO.	DC-044B	CHECK	G.C.Chen	REV.	A1
UNIT : mm	TOLERANCE OTHERWISE	UP TO 5 ABOVE 5~30 ABOVE 30 ANGLE	±0.2 ±0.3 ±0.5 0°±3°	ANGLE	APPROVAL
		SCALE	2:1	DATE	PAGE
					1 OF 1