
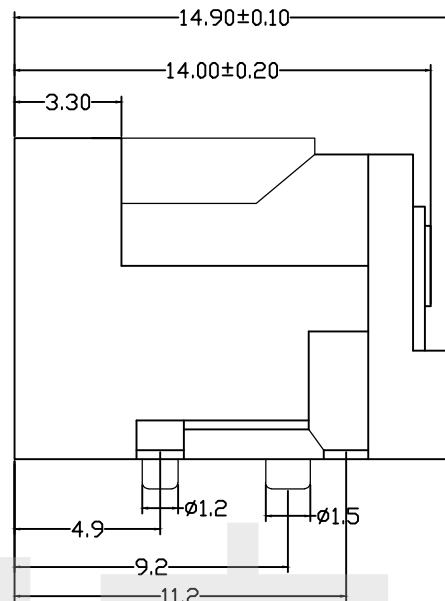


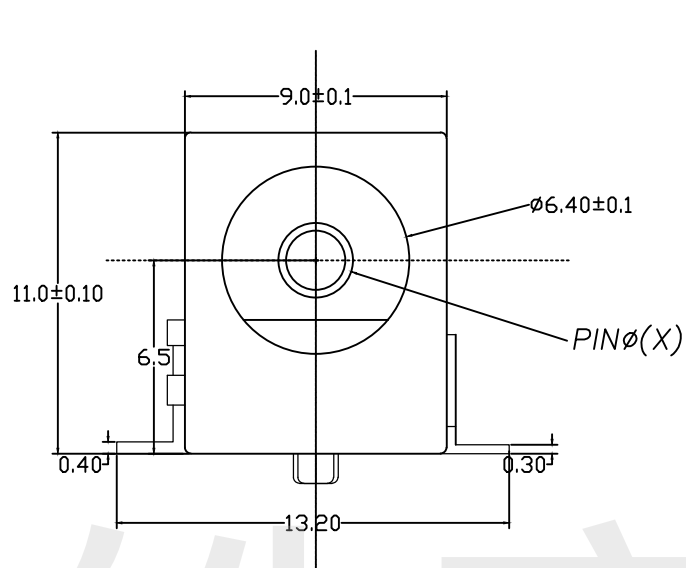

Model No.	1	2
PINØ(X)	2.0	2.5


主要技术规格:

1. 额定值: 1A DC16V
2. 接触电阻: 50mΩ
3. 插拔力: 3-20N
4. 使用温度: -25℃T0+85℃
5. 绝缘电阻: 100MΩ
6. 抗电强度: 500V 50HZ 1Min.
7. 寿命: 5000 Cycles


材料:

- ①基座: PA9T (黑色)
②电极柱: 黄铜(镀铜锡)
③开关弹片: 磷铜(镀铜锡)
④开关静片: 黄铜(镀铜锡)
⑤后盖板: PA9T (黑色)
⑥电极柱引脚: 黄铜(镀铜锡)

电路图

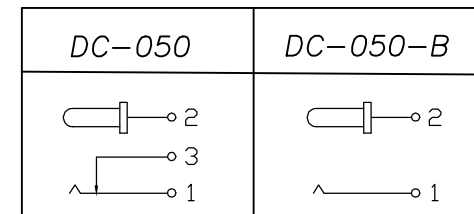

安装示意图

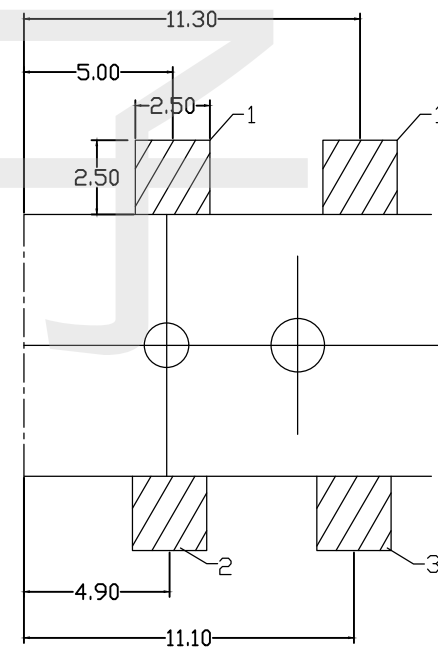

HAOFU ELECTRONICS TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		DC POWER JACK			DRAWING	Y,C,ZHANG	DWG.No.	SBICL
PART NO.		DC-050-X			CHECK	G.C.Chen	REV.	A1
	UNIT :	TOLERANCE OTHERWISE	UP TO 5 ABOVE 5 ~30 ABOVE 30 ANGLE	±0.2 ±0.3 ±0.5 ±3°	ANGLE	APPROVAL	DATE	
	mm				0°±3°	SCALE	2:1	PAGE