
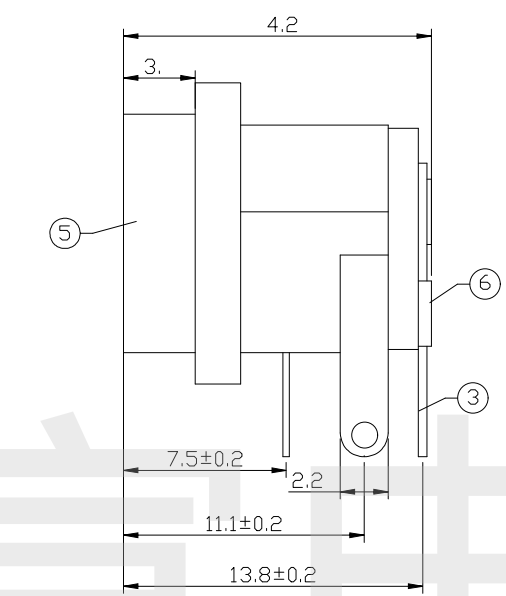




主要技术性能

1. 额定电负荷：DC 30V 0.5A;
2. 接 触 电 阻： $\leq 0.03 \Omega$;
3. 绝 缘 电 阻： $\geq 100M \Omega$;
4. 耐 压：AC500V (50Hz)min;
5. 插 拔 力：3-15N;
6. 寿 命：5,000次。

SCHEMATIC



PIN	Ø2.0	Ø2.35	Ø2.5
APPD.			

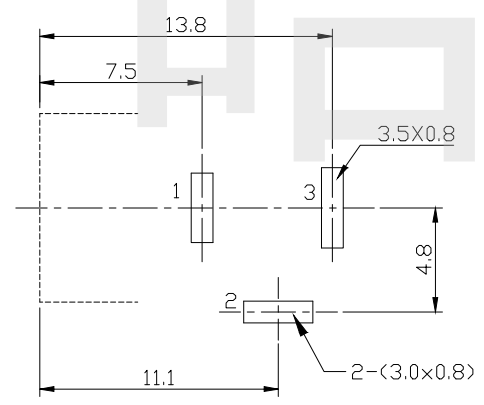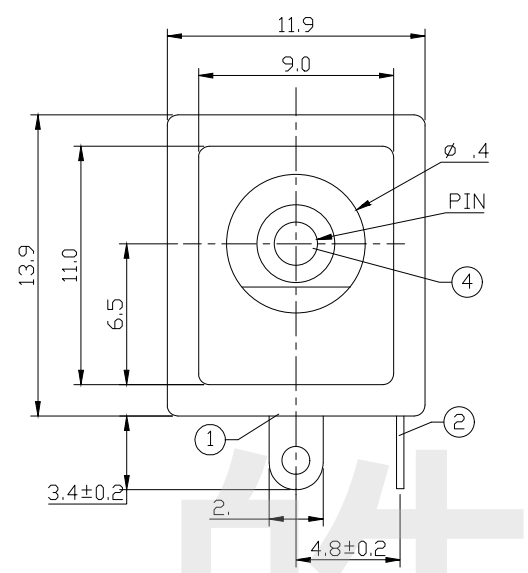

P.C.B LAYOUT
TOP VIEW

6	COVRE	1	PBT	
5	HOUSING	1	PBT	
4	PIN	1	BRASS	Ni-P1ating
3	FLAT PIECE	1	BRASS	Sn-P1ating
2	CURVE PIECE	1	BRASS	Sn-P1ating
1	SPRING	1	BRONZE	Sn-P1ating
NO.	DESCRIPTION	QTY	MATERIL	PLATING

HAOFU ELECTRONCS TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		DC POWER JACK			DRAWING	G.C.Chen	DG.No.	
PART NO.		DC-063			CHECK	G.C.Chen	REV.	A
	UNIT : mm	TOLERANCE OTHERWISE	UP TO 5	±0.2	APPROVAL		DATE	
			ABOVE 5 ~30	±0.3				
	mm		ABOVE 30	±0.5	SCALE	2:1	PAGE	1 OF 1
			ANGLE	±3°				