

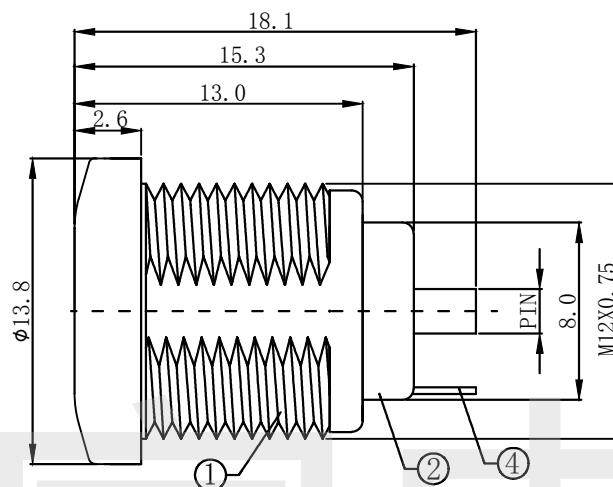





PIN	φ 2.0	φ 2.5
APPD		

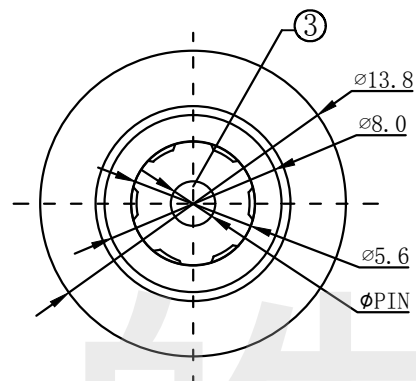


机壳开孔

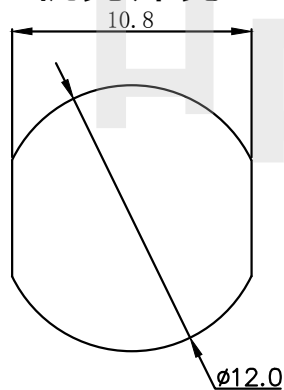


螺帽

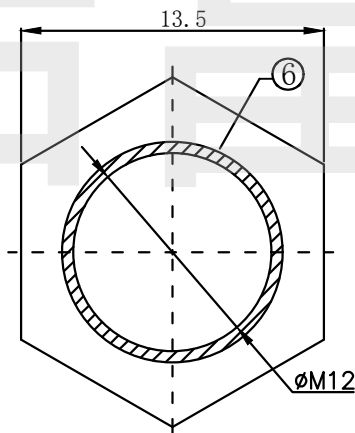

DC MATE PLUG



CIRCUIT DIAGRAM



- 技术要求
- 1、插入力: 2.94~29.4N(0.3~3.0kgf)
 - 2、拔出力: 2.94~29.4N(0.3~3.0kgf)
 - 3、接触电阻: $\leq 50\text{m}\Omega$
 - 4、绝缘电阻: $>100\text{M}\Omega$ DC 500V
 - 5、耐电压: AC 500V 1min无飞弧及击穿
 - 6、寿命: 5000 10~20次/min
 - 7、额定负载: DC 12V 6A
 - 8、适用温度范围: $-25\sim 85^{\circ}\text{C}$
 - 9、推荐使用插头:

6	DC-022D-6	螺帽	PCS	锌合金	镀锡	环保
5	DC-022D-5	内心塑胶	PCS	PBT (BLACK)	黑色	环保
4	DC-022D-4	弹片	PCS	磷铜	镀锡	环保
3	DC-022D-3	PIN	PCS	黄铜棒	镀锡	环保
2	DC-022D-2	铜套	PCS	锌合金	镀锡	环保
1	DC-022D-1	塑料座	PCS	PBT (BLACK)	黑色	环保
序号	零件图代号	名称	数量	材料	镀层/颜色	备注

HAOFU ELECTRONCS TECHNOLOGY CO., LTD

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		DC POWER JACK		DRAWING		Y,C,ZHANG	DWG.No.	SBICL
PART NO.		DC-022D		CHECK		G.C.Chen	REV.	A1
	UNIT :	TOLERANCE OTHERWISE	UP TO 5	±0.2	ANGLE	APPROVAL	DATE	1 OF 1
			ABOVE 5~30	±0.3				
	mm		ABOVE 30	±0.5	0°±3'	SCALE	PAGE	
			ANGLE	±3'				