
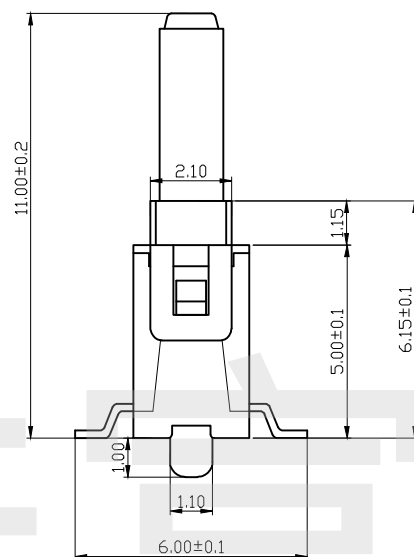
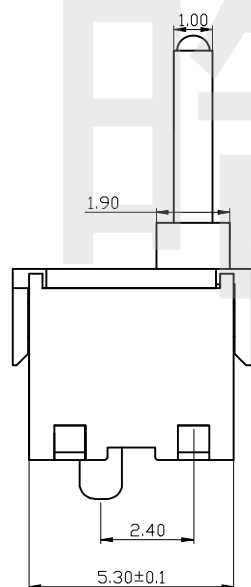
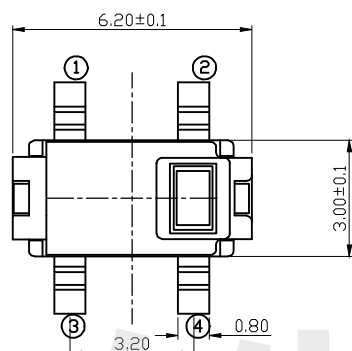



安装参考图

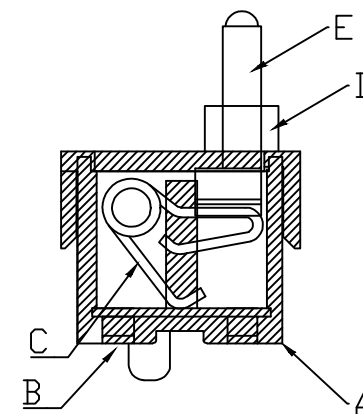

电路图

主要技术规格:

1. 额定值: 10mA DC12V
2. 接触电阻: $\leq 200\text{m}\Omega$
3. 操作力: $50\text{gf} \pm 30\text{gf}$
4. 行程: $1.0 \pm 0.3\text{mm}$
5. 绝缘电阻: $\geq 100\text{M}\Omega$
6. 耐压强度: AC250V 50Hz/1Min.
7. 寿命: 5万Cycles Min
8. 温度范围: -30°C T0 $+85^\circ\text{C}$

材料:

- A底座: 进口增强尼龙(黑色)
B嵌件: 进口磷青铜(镀银与银白色)
C弹簧: 进口磷青铜(镀银与银白色)
D盖板: 进口增强尼龙(黑色)
E按钮: 进口增强尼龙(黑色)

HAOFU ELECTRONICS TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		DETECTION SWITCH				DRAWING	Y,C,ZHANG	DWG.No.	SBICL
PART NO.		TD-1130SA-01				CHECK	G.C.Chen	REV.	A1
	UNIT :	TOLERANCE OTHERWISE	UP TO 5	±0.2	ANGLE	APPROVAL		DATE	
	mm		ABOVE 5 ~ 30	±0.3					
			ABOVE 30	±0.5					
			ANGLE	±3°	SCALE	2:1	PAGE	1 OF 1	