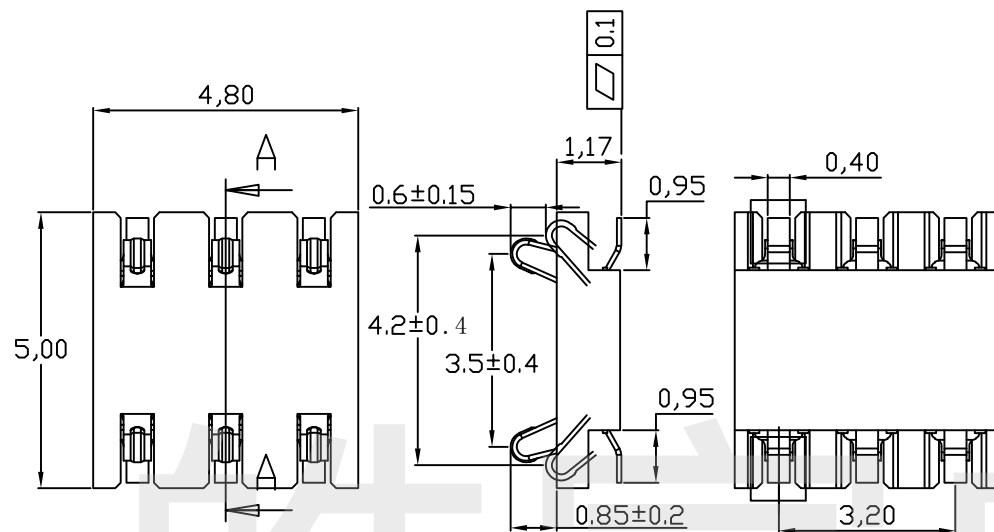
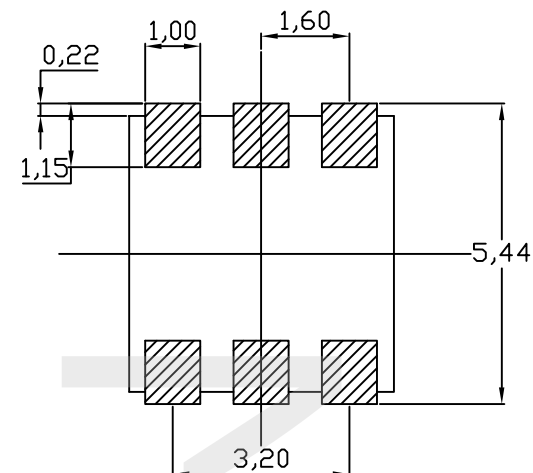


剖面 A-A

RECOMMENDED PCB LAYOUT
TOL:(<±0.05)

性能:

额定电流: 1.0A

额定电压: 12V

耐电压: 500V

接触电阻: 30mΩ 以内

绝缘电阻: 500MΩ

工作温度: -40℃~+85℃

塑件(材质): LCP 黑色

接触点(材质): 铜合金, 触点镀金3U"

HAOFU ELECTRONICS TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME

CONNECTOR

DRAWING

Y,C,ZHANG

DWG.No.

SBICL

PART NO.

BC6P16H12

CHECK

G.C.Chen

REV.

A1



UNIT :

mm

TOLERANCE
OTHERWISEUP TO 5
ABOVE 5 ~30
ABOVE 30
ANGLE±0.2
±0.3
±0.5
±3°

ANGLE

APPROVAL

SCALE

2:1

DATE

PAGE

1 OF 1