

性能:

额定电流: 1.0A

额定电压: 12V

耐电压: 500V

接触电阻: 30mΩ MAX




绝缘电阻: 500MΩ

工作温度: -40℃~+85℃


塑件(材质): LCP

接触点(材质): 磷铜, 触点镀金3U",

使用寿命: 3000次以上

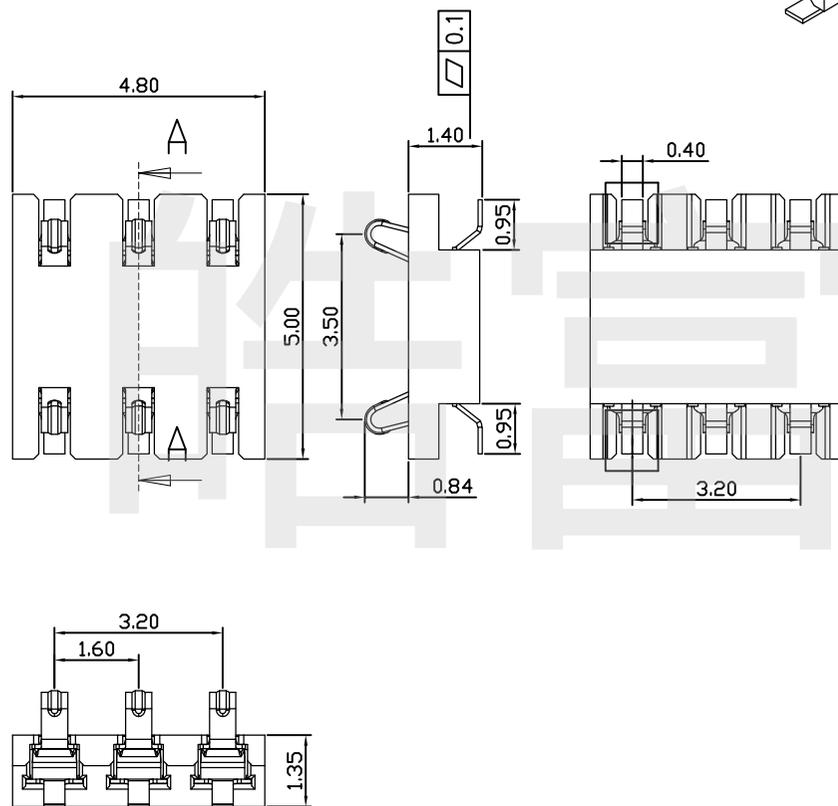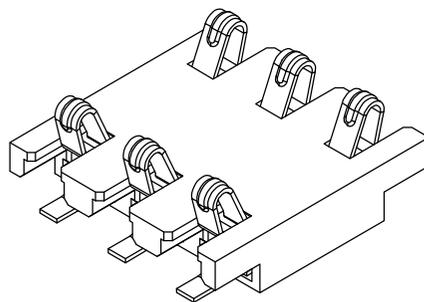

剖面 A-A

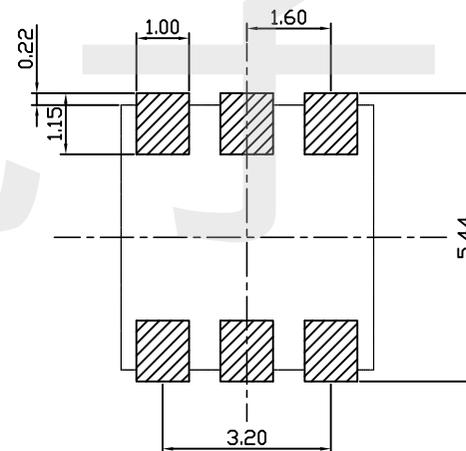

RECOMMENDED PCB LAYOUT
TOL:(±0.05)

HAOFU ELECTRONCS TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		CONNECTOR		DRAWING	Y,C,ZHANG	DWG.No.	SBICL
PART NO.		BC6P16H14		CHECK	G.C.Chen	REV.	A1
UNIT :	TOLERANCE OTHERWISE	UP TO 5	±0.2	ANGLE	APPROVAL	DATE	
		ABOVE 5~30	±0.3				
mm		ABOVE 30	±0.5	0°±3'	SCALE	PAGE	1 OF 1
		ANGLE	±3'		2:1		