


RECOMMENDED PCB LAYOUT  
TOP VIEW (. XX ± 0.05)

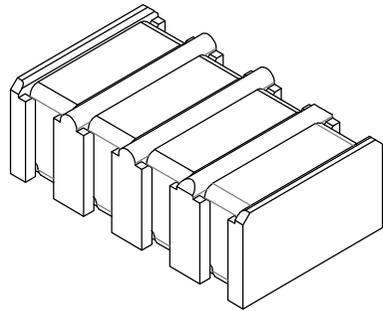

性能:

- 额定电流: 2.0A
- 额定电压: 12V
- 耐电压: 500V
- 接触电阻: 30mΩ MAX
- 绝缘电阻: 500MΩ
- 工作温度: -40℃~+85℃
- 使用寿命: 5000次以上
- 塑件(材质): LCP BLACK
- 接触点(材质): 黄铜C2680,  
接触面镀金3U, 焊脚镀金1U

HADFU ELECTRONCS TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		CONNECTOR		DRAWING		Y,C,ZHANG	DWG.No.	SBICL
PART NO.		BC4P25H34		CHECK		G.C.Chen	REV.	A1
	UNIT :	TOLERANCE OTHERWISE	UP TO 5	±0.2	ANGLE	APPROVAL	DATE	
	mm		ABOVE 5 ~30	±0.3			0°±3'	PAGE
			ABOVE 30	±0.5	SCALE		2:1	
			ANGLE	±3'				