
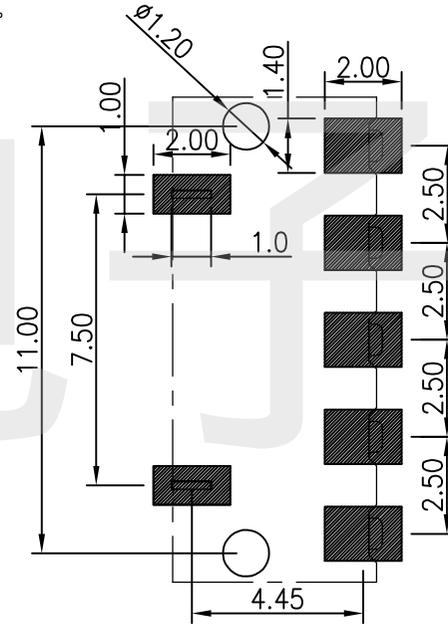
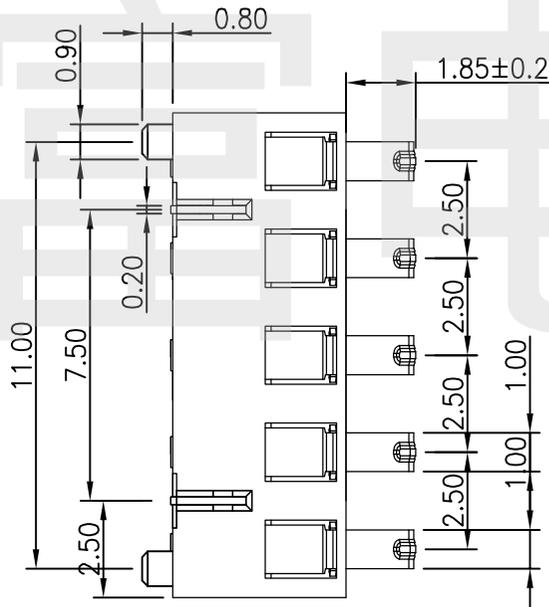
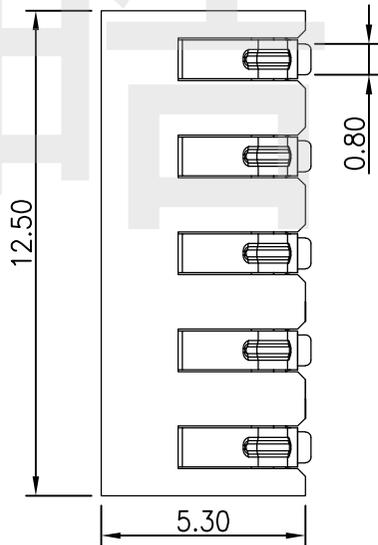


性能:

额定电流: 2.0A  
 额定电压: 12V  
 耐电压: 500V  
 接触电阻: 30mΩ  
 绝缘电阻: 500MΩ  
 工作温度: -40℃~+85℃  
 使用寿命: 5000次以上  
 塑件(材质): LCP(黑色) UL94-V0  
 接触点(材质): 铜合金, 触点镀金3U",  
 焊脚镀金1U"  
 固定片(材质): 黄铜C2680, 镀全雾锡70U"以上  
 环保要求: 符合ROHS限值。

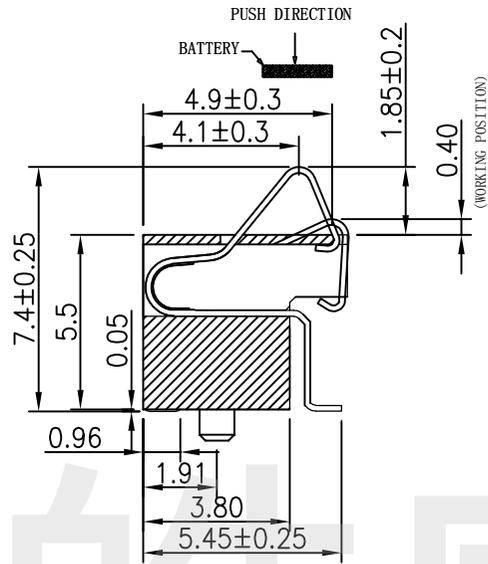

RECOMMENDED PCB LAYOUT  
 TOP VIEW (. XX ± 0.05)

HAOFU ELECTRONICS TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		CONNECTOR		DRAWING	Y,C,ZHANG	DWG.No.	SBICL
PART NO.		BC5P25H55D		CHECK	G.C.Chen	REV.	A1
UNIT :	TOLERANCE OTHERWISE	UP TO 5	±0.2	APPROVAL	SCALE	DATE	
		ABOVE 5~30	±0.3			PAGE	1 OF 1
mm		ABOVE 30	±0.5		2:1		
		ANGLE	±3'				