


FOR REFERENCE ONLY

RoHS Compliant
Halogen Free

SYMBOL	REV.	REVISION	APPROVAL	DATE

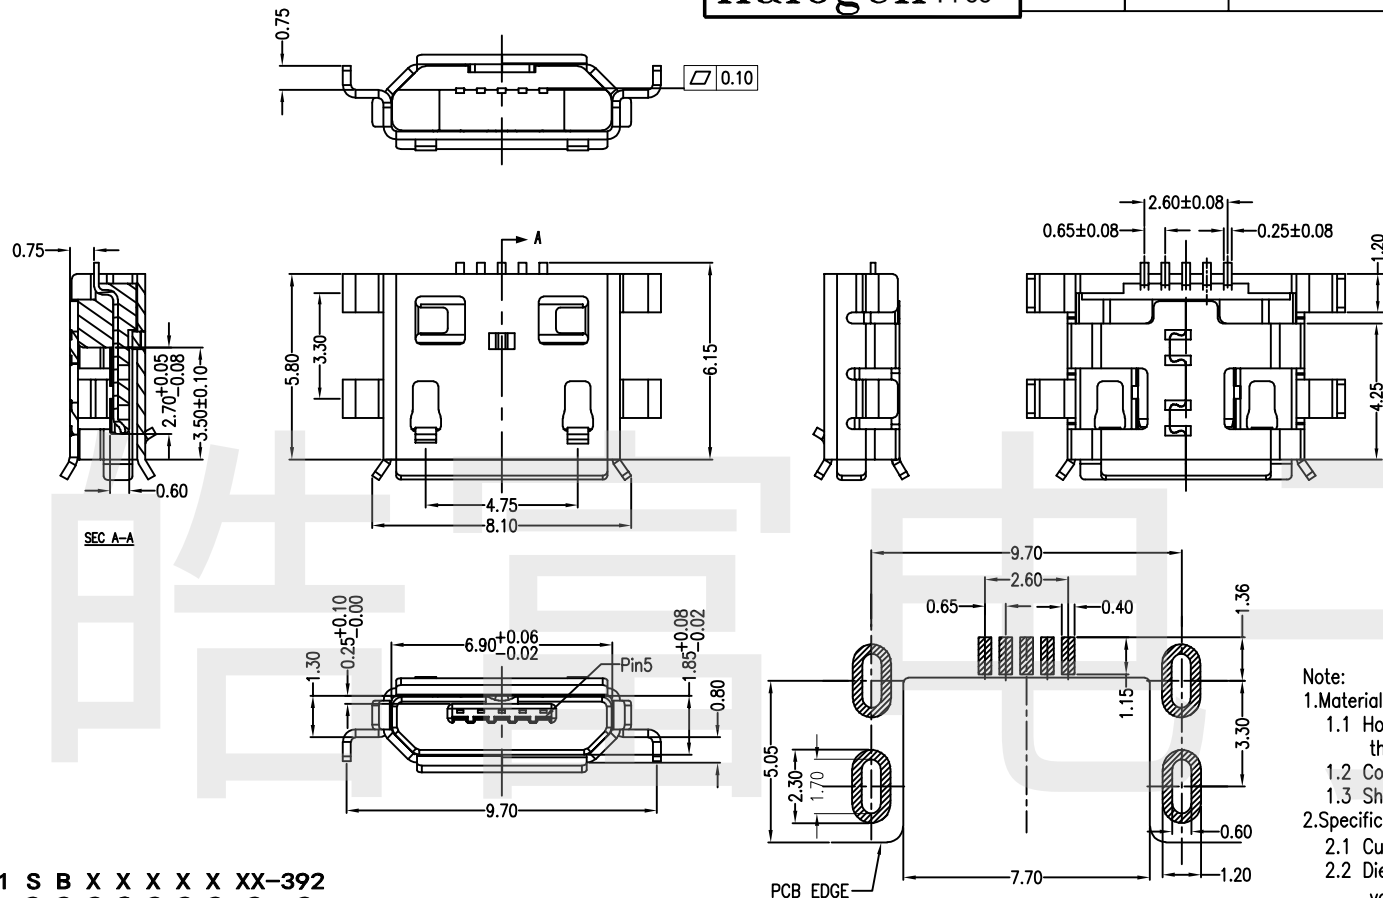

A 01 S B X X X X X XX-392

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪

外壳材质 1: C2680R-H
端子电镀 01: Au1u''; 02: Au1.5u''; 03: Au3u''
05: Au5u''; 10: Au10u''; 15: Au15u''; 30: Au30u''
主体颜色 B: 黑色
主体材质 1: LCP
端子材质 4: C8191R-EH

Note:

1. Material:

- 1.1 Housing: High temperature thermoplastic with g.f, UL94v-0
- 1.2 Contact: copper alloy, t=0.15mm
- 1.3 Shell: copper alloy, t=0.25mm

2. Specification:

- 2.1 Current rating: 1.5PIN 1.8A Max/2,3,4PIN 1A Max.
- 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 100 MΩ Min.
- 2.5 Total mating force: 3.57 Kg Max.
- 2.6 Total unmating force: 1.0 Kg Min.
- 2.7 Temperature range: -30°C~80°C

CIKI 东莞市皓富电子科技有限公司
DONGGUAN CITY HAOFU ELECTRONCS TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		CONNECTOR			DRAWING	Z. L. Liang	DWG. No.	ST0015
PART NO.		MICRO USB 5S TYPE SMT 沉板式0.8四脚全插有导位无孔			CHECK	G. C. Chen	REV.	A0
	UNIT :	TOLERANCE UNLESS OTHERWISE SPECIFIED	X. X ± 0.3 X. XX ± 0.2 X. XXX ± 0.1	ANGLE	APPROVAL	G. C. Chen	DATE	2020-Oct-11
	mm			±2°	SCALE	1 : 1	PAGE	1 OF 1