
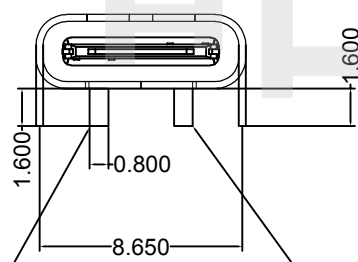



FOR REFERENCE ONLY


RoHS Compliant
Halogen Free

SYMBOL	REV.	REVISION	APPROVAL	DATE



正极

负极

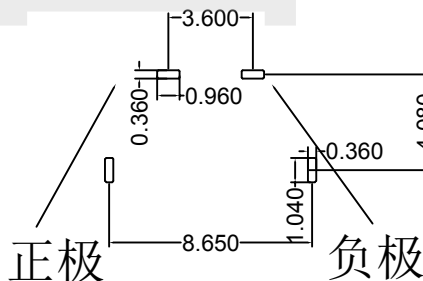

正极

负极

NOTES:

- MATERIAL:
MOLDING: LCP UL94 V-0
CONTACT: COPPER ALLOY.
GOLD PLATED Min ON CONTACT AREA, 100u"
Min TIN (LEAD FREE) ON SOLDER AREA,
SHELL: SUS304-H, T=0.30±0.03mm
50u" NICKEL PLATING OVER ALL.
- MECHANICAL:
INSERTION: 5~20N.
EXTRACTION: 8~20N AFTER TEST.
DURABILITY: 10000 CYCLES
- ELECTRICAL:
CURRENT: 3A FOR VBUS;
1.25A FOR GND PIN.
0.25A FOR OTHER.
VOLTAGE: 20 V MAX
WITHSTANDING VOLTAGE: 100V AC R.M.S.
CONTACT RESISTANCE: 40mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN.
- ENVIRONMENTAL
TEMPERATURE RANGE -25°C ~ +85°C
- 尺寸标注事项:
图示有标示 "X" 者为首样全检, 重点管控尺寸.
- 产品符合RoHS标准.

Table:

成品料号	零件名称	零件料号	材料 / 电镀
TX	端子	TX	SUS 304 R-H NO PLATING
	塑胶材料	TX	SUS 301 R-H Sn 80~200u".
	外壳	TX	SUS 301 R-H 电镀切料带后.

CIKI 东莞市皓富电子科技有限公司
DONGGUAN CITY HAOFU ELECTRONCS TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		CONNECTOR			DRAWING	Z. L. Liang	DWG. No.	ST0015
PART NO.		TYPEC-2P-90DIP			CHECK	G. C. Chen	REV.	A0
	UNIT :	TOLERANCE UNLESS OTHERWISE SPECIFIED	X. X $\pm$ 0.3 X. XX $\pm$ 0.2 X. XXX $\pm$ 0.1	ANGLE	APPROVAL	G. C. Chen	DATE	2020-Oct-11
	mm			$\pm$ 2°	SCALE	1:1	PAGE	1 OF 1