


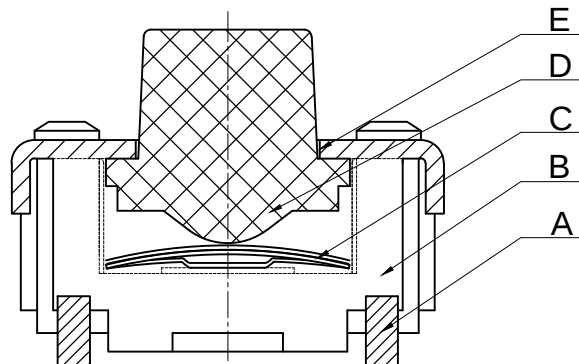
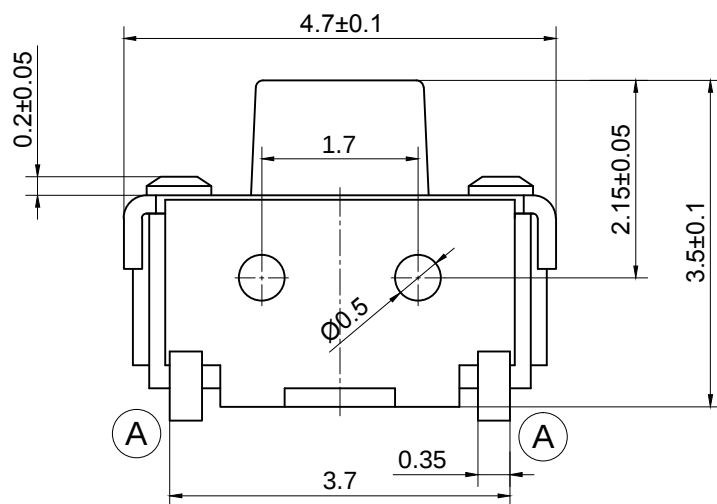
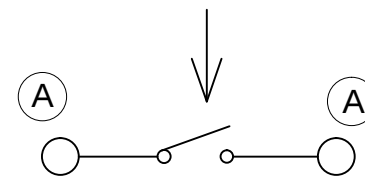


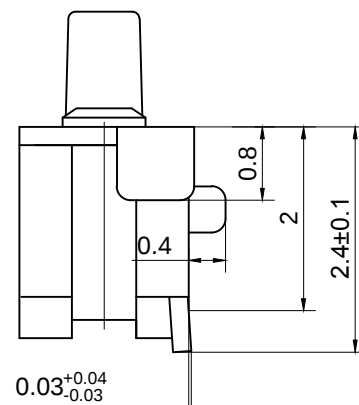

Circuit Diagram

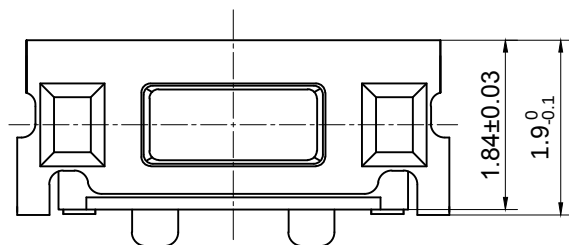

PCB.layout

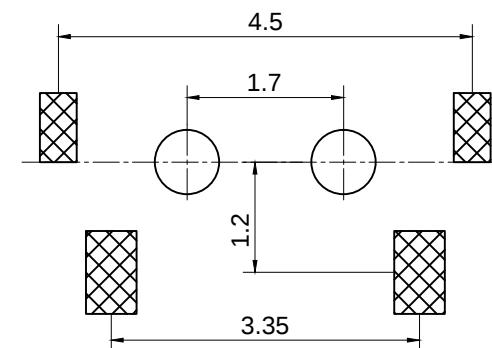

两脚落差不能超过0.03

主要技术规格:

1. 额定值: 0.5A DC12V
2. 接触电阻: 500mΩ
3. 操作力: 180±50gf
4. 绝缘电阻: 100MΩ
5. 抗电强度: 100V AC 50HZ 1Min.
6. 寿命: 50000 Cycles
7. 行程: 0.18±0.05mm
8. 使用温度: -30℃~+85℃

材料:

- 1盖板: 黄铜(镀银)
2按钮: LCP (黑色)
3弹片: 不锈钢(覆银)
4底座: LCP (白色)
5引脚: 黄铜(镀银)

东莞市皓富电子科技有限公司

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		TACT SWITCH				DRAWING	Y,C,ZHANG	DWG.No.	SBICL
PART NO.		TD-1806SA				CHECK	G.C.Chen	REV.	A1
	UNIT :	TOLERANCE OTHERWISE	UP TO 5	±0.2	ANGLE	APPROVAL		DATE	
	mm		ABOVE 5 ~30	±0.3					
			ABOVE 30	±0.5	0°±3°	SCALE	2:1	PAGE	1 OF 1
			ANGLE	±3°					