
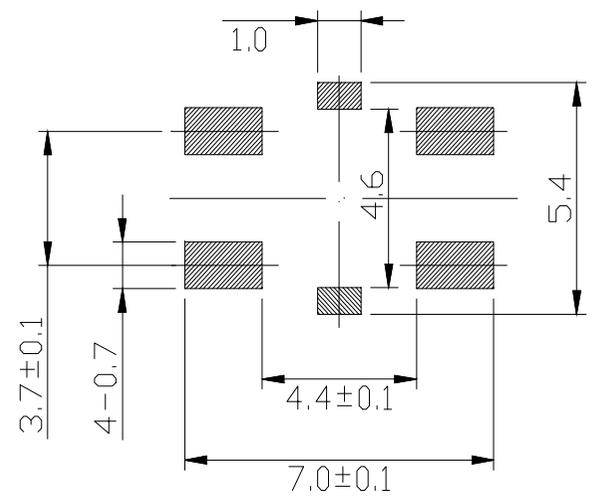


CIRCUIT DIAGRAM

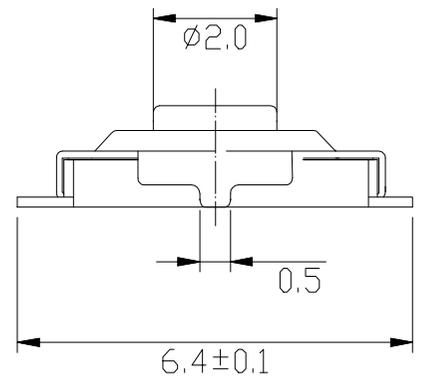

PCB LAYOUT

技术要求:

1. 塑料件表面光洁无划伤，水花，变形，影响外观及性能等缺陷。
2. 额定电流：50mA 12V DC，绝缘电阻100MΩmin，100V DC，介电强度250V ACfor 1min，接触电阻100MΩ max。操作温度-30℃~70℃，使用寿命20000次。
3. 开关手感明显，档位清晰可靠，无卡滞现象，消除外力后，应能快速回位。

HADFU ELECTRONCS TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		SWITCH		DRAWING		Y,C,ZHANG		DWG.No.		SBICL	
PART NO.		TD-13MA		CHECK		G.C.Chen		REV.		A1	
UNIT :	TOLERANCE OTHERWISE	UP TO 5 ±0.2 ABOVE 5~30 ±0.3 ABOVE 30 ±0.5 ANGLE ±3°	ANGLE	APPROVAL		DATE		14-03-2013			
				mm	SCALE	2:1		PAGE		1 OF 1	