

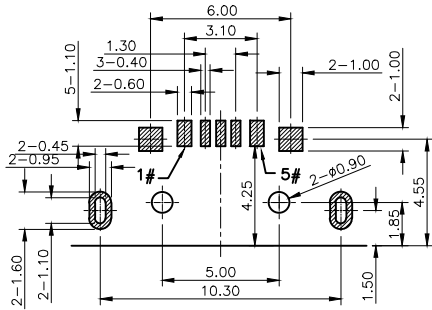
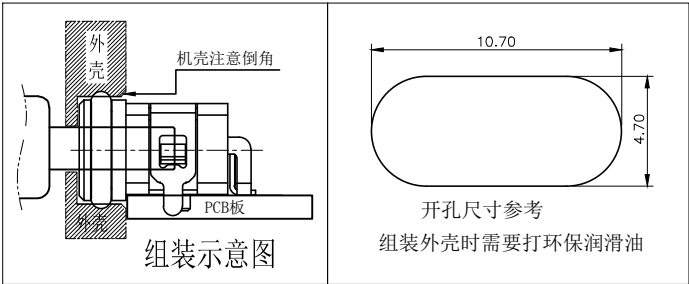
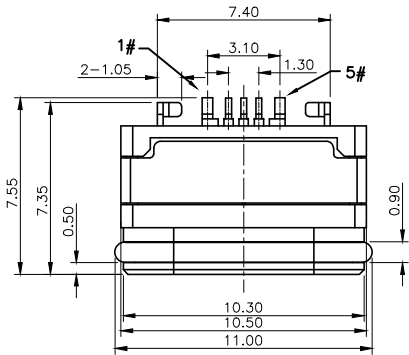



RoHS Compliant
Halogen Free



SYMBOL	REV.	REVISION	APPROVAL	DATE

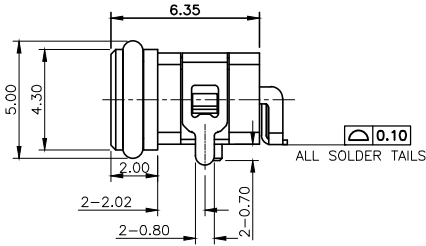

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)
GENERAL TOLERANCE: ± 0.05

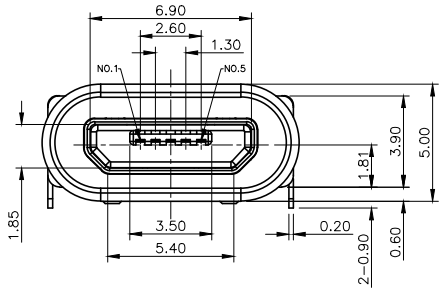

- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
 - RATING: 3A(PIN1&5), 0.5A(PIN2&3&4);
 - CONTACT RESISTANCE: 30 mΩ MAX.(INITIAL);
 - DIELECTRIC WITHSTANDING: 500V AC MIN.;
 - INSULATION RESISTANCE: 1000MΩ MIN.;
 - DURABILITY: 10,000 CYCLES MIN.;
 - INSERTION FORCE: 3.5Kgf (35N) Max.;
 - EXTRACTION FORCE: 0.8Kgf (8N) Min.;
 - WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX8.
 - PLUG INTERFACE DIMENSIONS COMFORM TO USB2.0 SPEC.
 - PACKAGING: TAPE & REEL.
 - Waterproof grade: IPX8

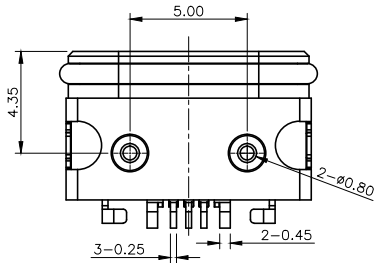

Contact Number	Signal Name	Remarks
1#	VBUS	Power
2#	D-	Date-
3#	D+	Date+
4#	ID	Reserve or Gound
5#	GND	Gound

3	Shell1/2	2	Ni Plating	
2	Contact	5	Phosphor bronze Au/Ni Plating T=0.20mm	
1	Housing	1	PA10T (G.F30%)	
ITEM PART NAME Q'TY			FINISH	NOTE

CIKI 东莞市皓富电子科技有限公司
DONGGUAN CITY HAOFU ELECTRONICS TECHNOLOGY CO., LTD

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		MICRO USB CONNECTOR		DRAWING	Z. L. Liang	DWG. No.	
PART NO.		MICRO USB 5P B TYPE防水板上不锈钢壳长6.35两脚插板带柱		CHECK	G. C. Chen	REV.	A0
	UNIT :	TOLERANCE UNLESS OTHERWISE SPECIFIED	X. X $\pm$ 0.3 X. XX $\pm$ 0.2 X. XXX $\pm$ 0.1	ANGLE	G. C. Chen	DATE	
			mm	$\pm 2^\circ$	SCALE	1:1	PAGE 1 OF 1